



# Accelerating C-V2X commercialization

---




# Shaping the future of automotive

- Connecting vehicles to everything
- Transforming the in-vehicle experience
- Paving the road to autonomous driving



# Paving the road to tomorrow's autonomous vehicles

Offering essential technologies for the connected car platform

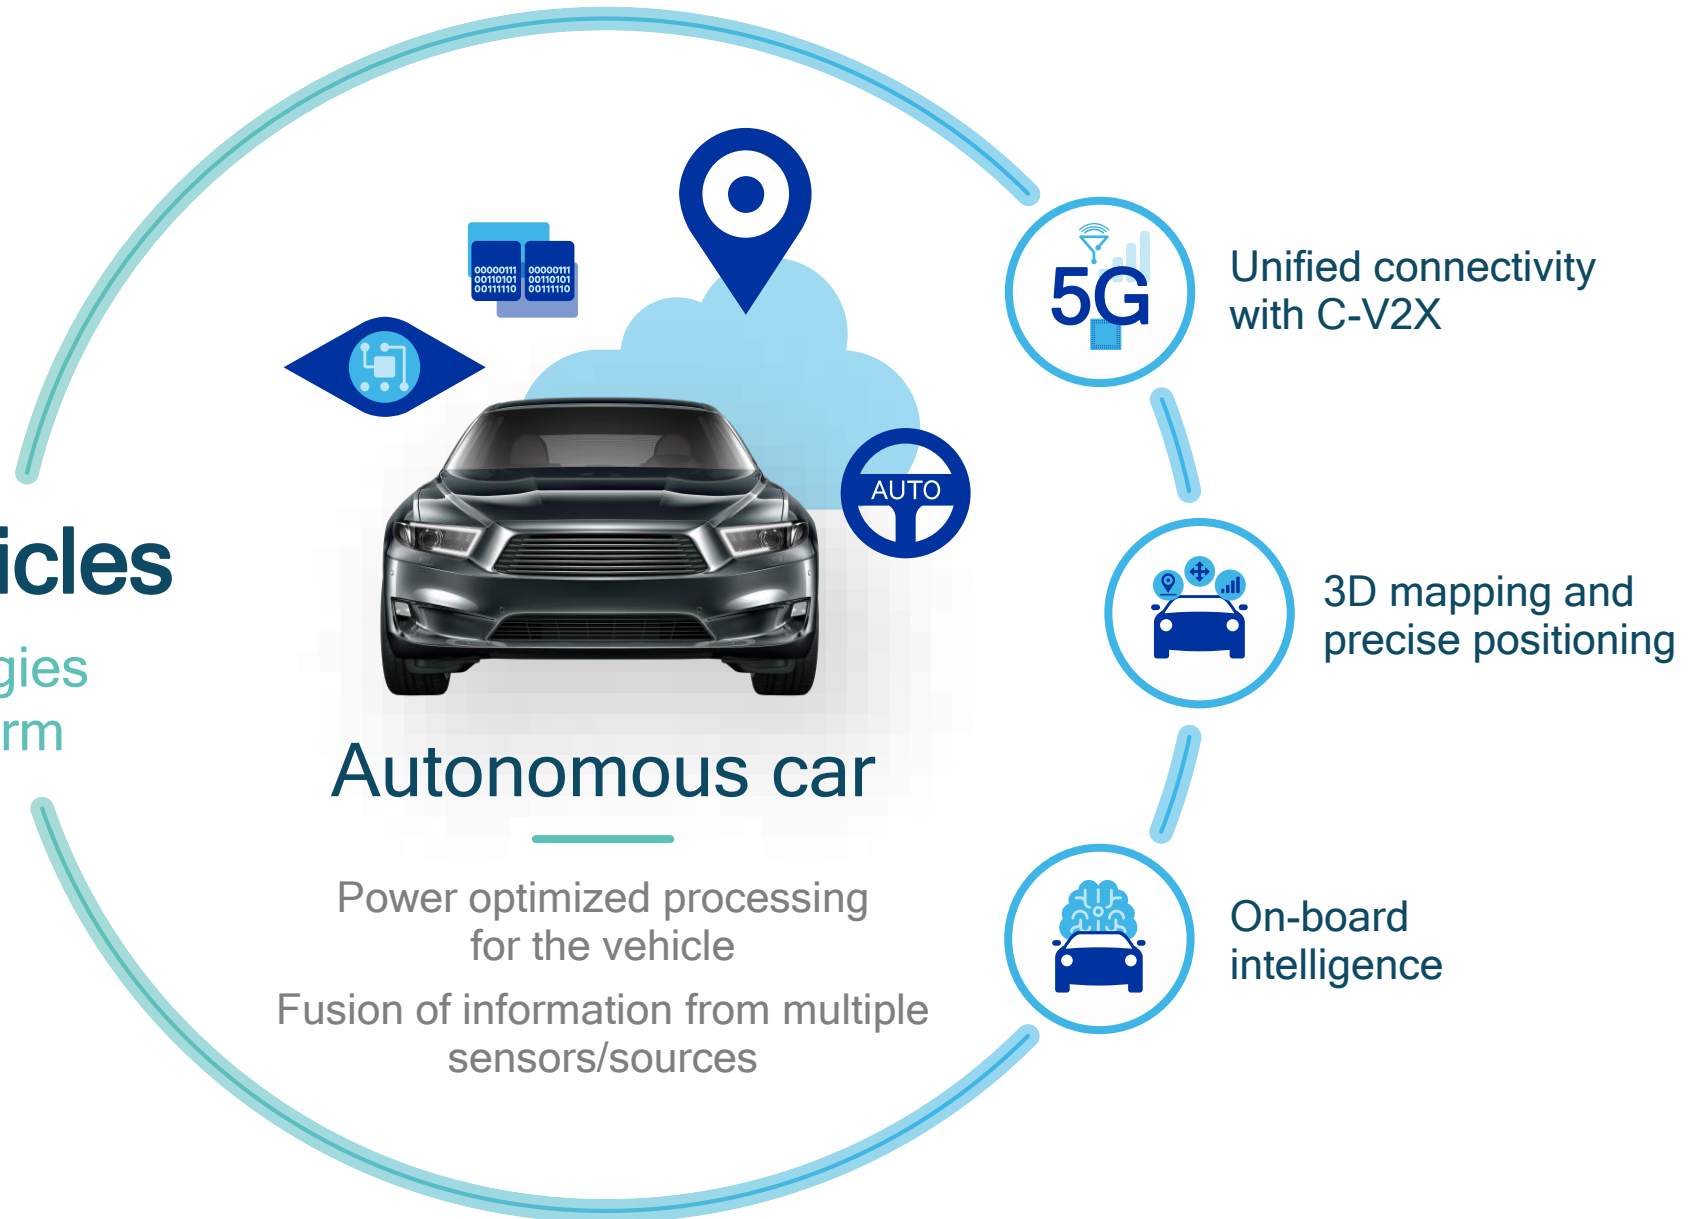

## Autonomous car

Power optimized processing for the vehicle

Fusion of information from multiple sensors/sources



# 5G unified connectivity

Intelligently connecting  
the car to cloud and  
surroundings

Vehicle-to-vehicle

Vehicle-to-pedestrian

Vehicle-to-infrastructure  
3D HD live map updates

Vehicle-to-network

Teleoperation

AR / VR

HD video




# Continuous V2X technology evolution required

And careful spectrum planning  
to support this evolution

Evolution to 5G,  
while maintaining backward compatibility


**Basic safety**  
802.11p or C-V2X R14

Established foundation  
for V2X

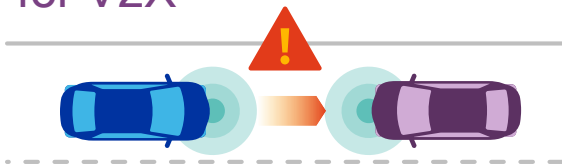

**Enhanced safety**  
C-V2X R14/15



Enhanced range and reliability

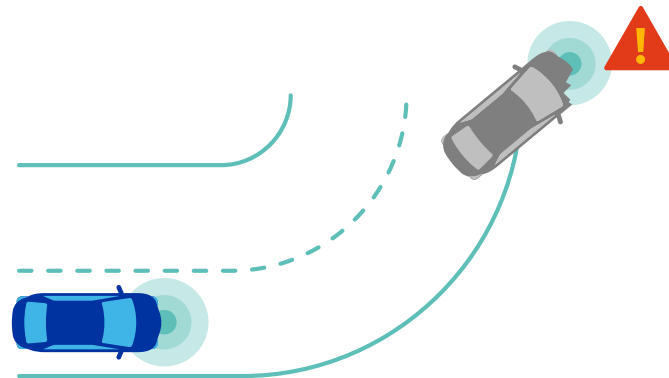

**Advanced safety**  
C-V2X R16 (building upon R14)

Higher throughput  
Higher reliability

Wideband ranging  
and positioning  
Lower latency



# Evolving C-V2X towards 5G for autonomous driving


## D2D communications

R12/13



## Enhanced safety

C-V2X R14 (Ph. I) C-V2X R15 (Ph. II)



## Autonomous driving

C-V2X R16 5G NR support (Ph. III)  
(Advanced safety applications)



Established foundation  
for basic D2D comm.

Enhanced communication's range  
and reliability for V2X safety

Ultra-reliable, low latency, high throughput  
communication for autonomous driving

Network independent	No	Yes	Yes
Communications <sup>1</sup>	Broadcast only	Broadcast only	Broadcast + Unicast/Multicast
High speed support	No	Yes	Yes
High density support	No	Yes	Yes
Throughput		High throughput for enhanced safety	Ultra-high throughput
Latency		Low latency for enhanced safety applications	Ultra-low latency
Reliability		Reliability for enhanced safety application	Ultra-high reliability
Positioning	No	Share positioning information	Wideband ranging and positioning


1. PHY/MAC communications; R16 is still under development

# C-V2X is a critical component for safer autonomous driving

## Communicating intent and sensor data even in challenging real world conditions


### Non line-of-sight sensing

Provides 360° NLOS awareness, works at night and in bad weather conditions

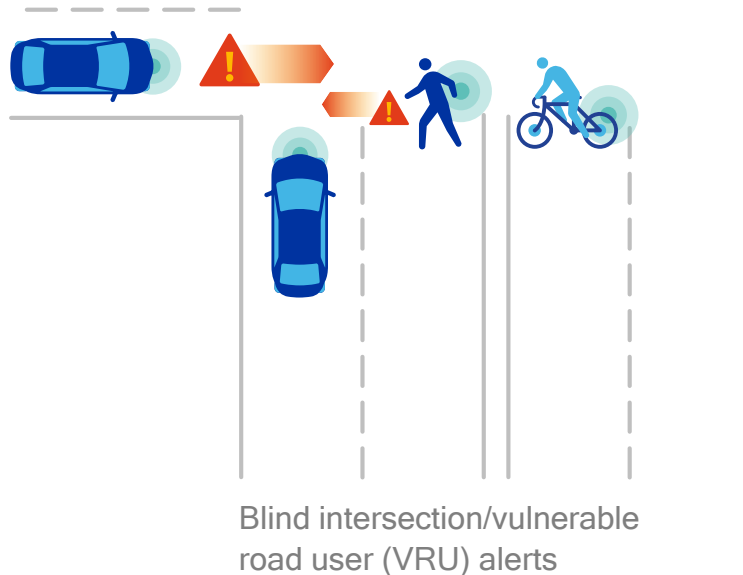


### Conveying intent

Shares intent, sensor data, and path planning info for higher level of predictability

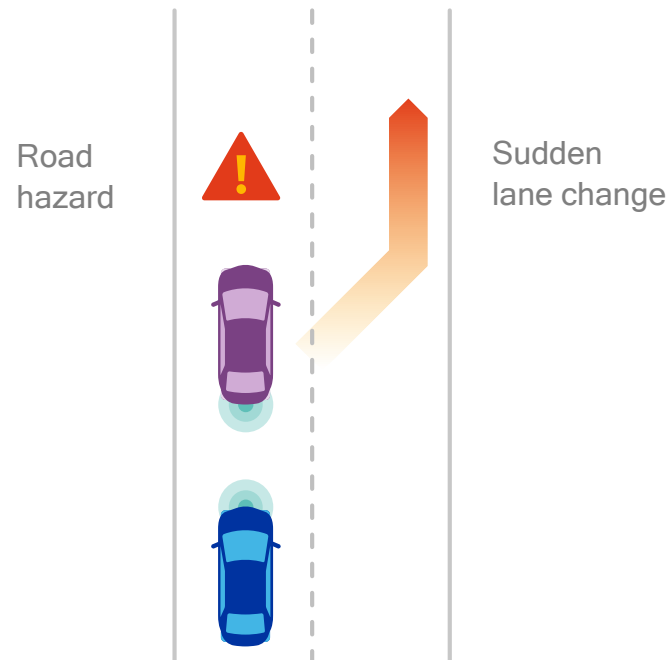

### Situational awareness

Offers increased electronic horizon to support soft safety alerts and graduated warning

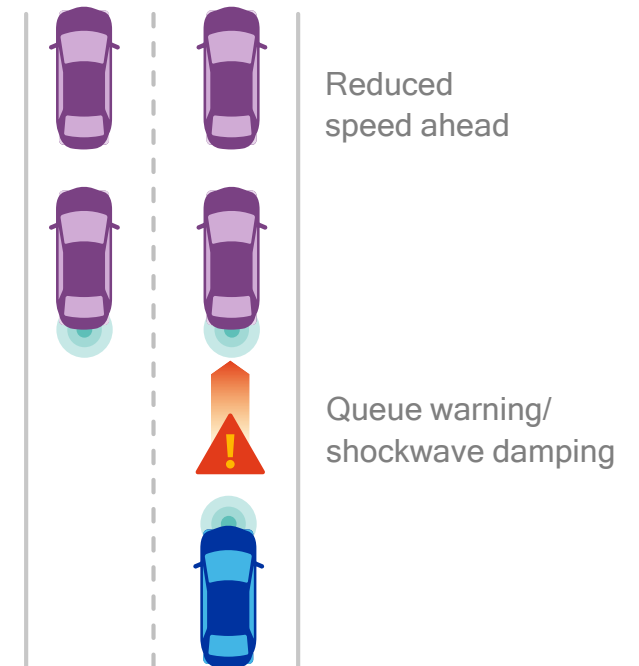

# High precision positioning is key for V2X operation

## Precise positioning

Use GNSS along with precise positioning services to get <1 meter accuracy

## Velocity


Accurate speed derived directly from GNSS positioning calculation

## Accurate time info

Using GNSS as a primary source of time synchronization

## Heading

Accurate heading derived directly from GNSS positioning calculation

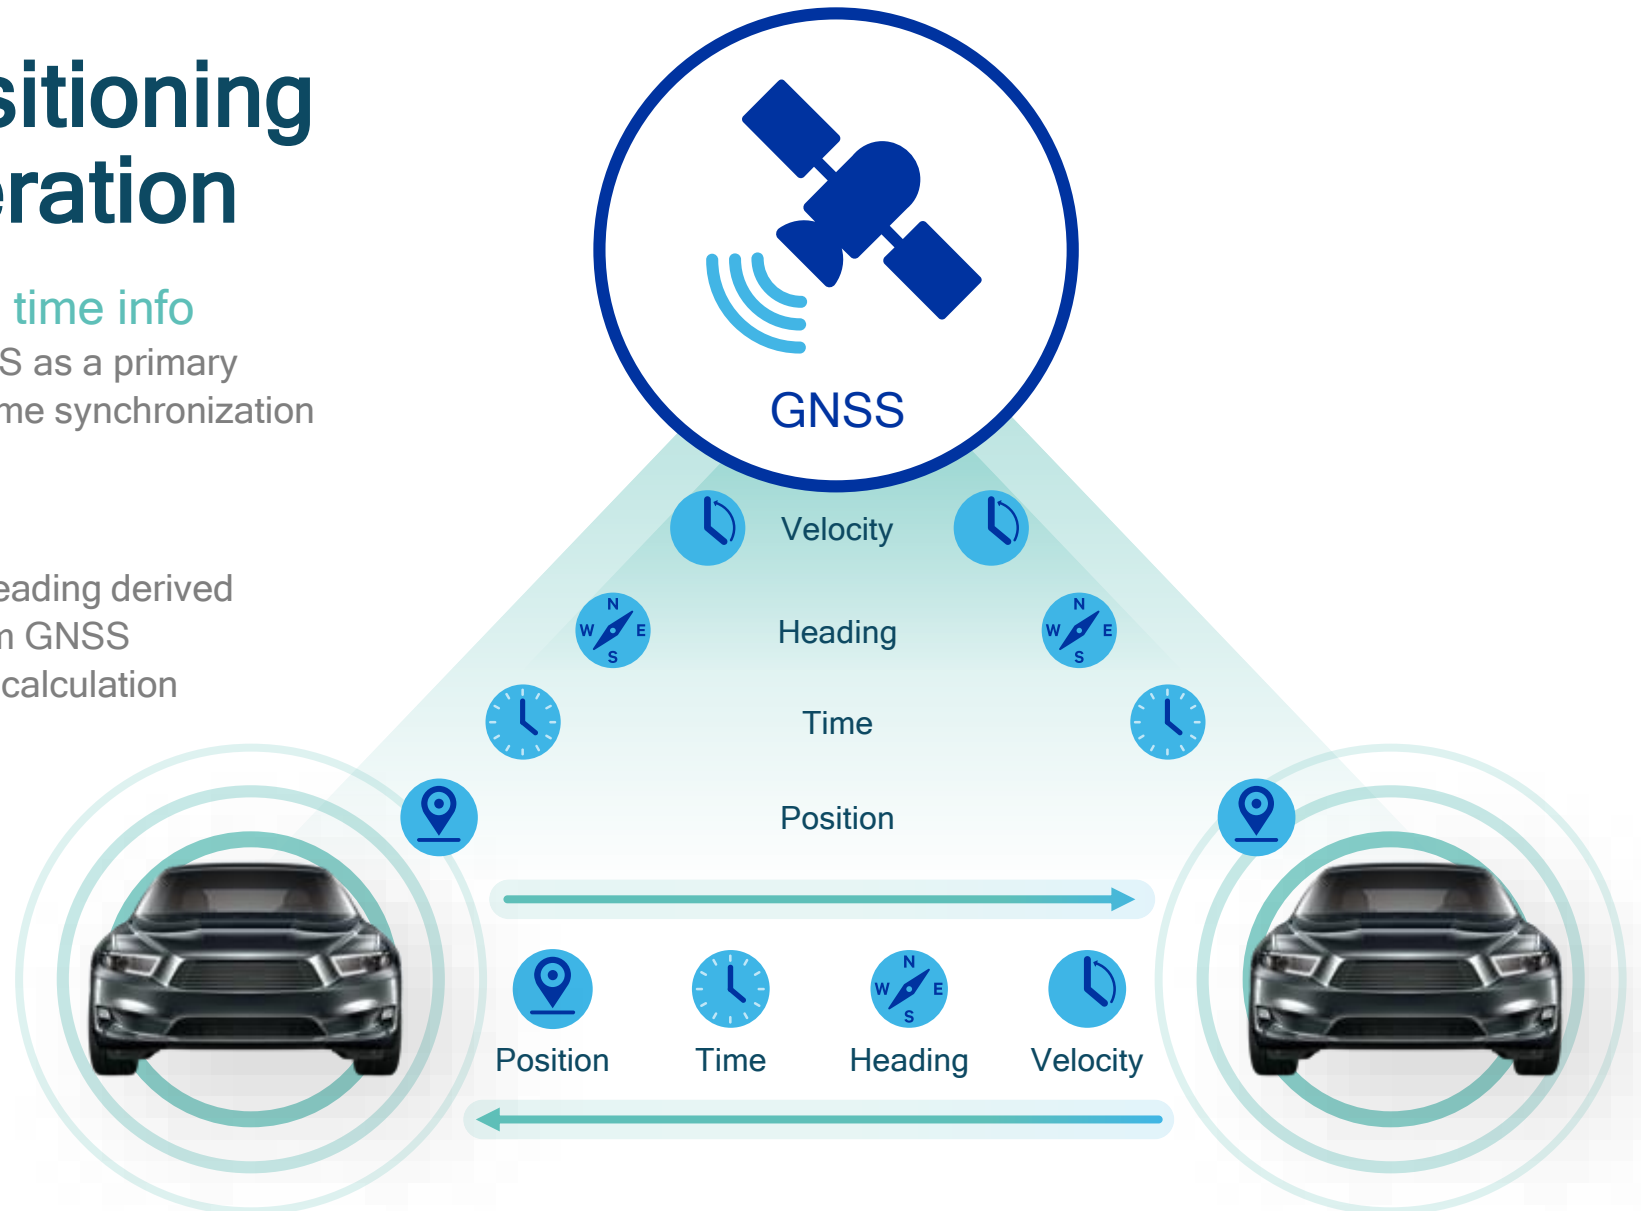



# Enhancing positioning on multiple fronts



## More accurate

---


Sub-meter level accuracy (e.g. lane-level accuracy) with high integrity for V2X and autonomous driving applications



## Anywhere, anytime

---

Combined precise GNSS positioning with sensor inputs to provide accurate positioning everywhere, including dense urban environments, parking garages and multi-level interchanges

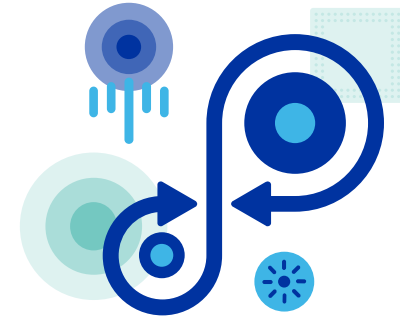


## More frequently updated

---

Updated very frequently to provide fresh, accurate positioning information (e.g. vehicles send their most recent location at least every 100ms for V2X applications)

# Evolving positioning technologies for V2X and autonomy

To offer more precise positioning, anywhere, anytime

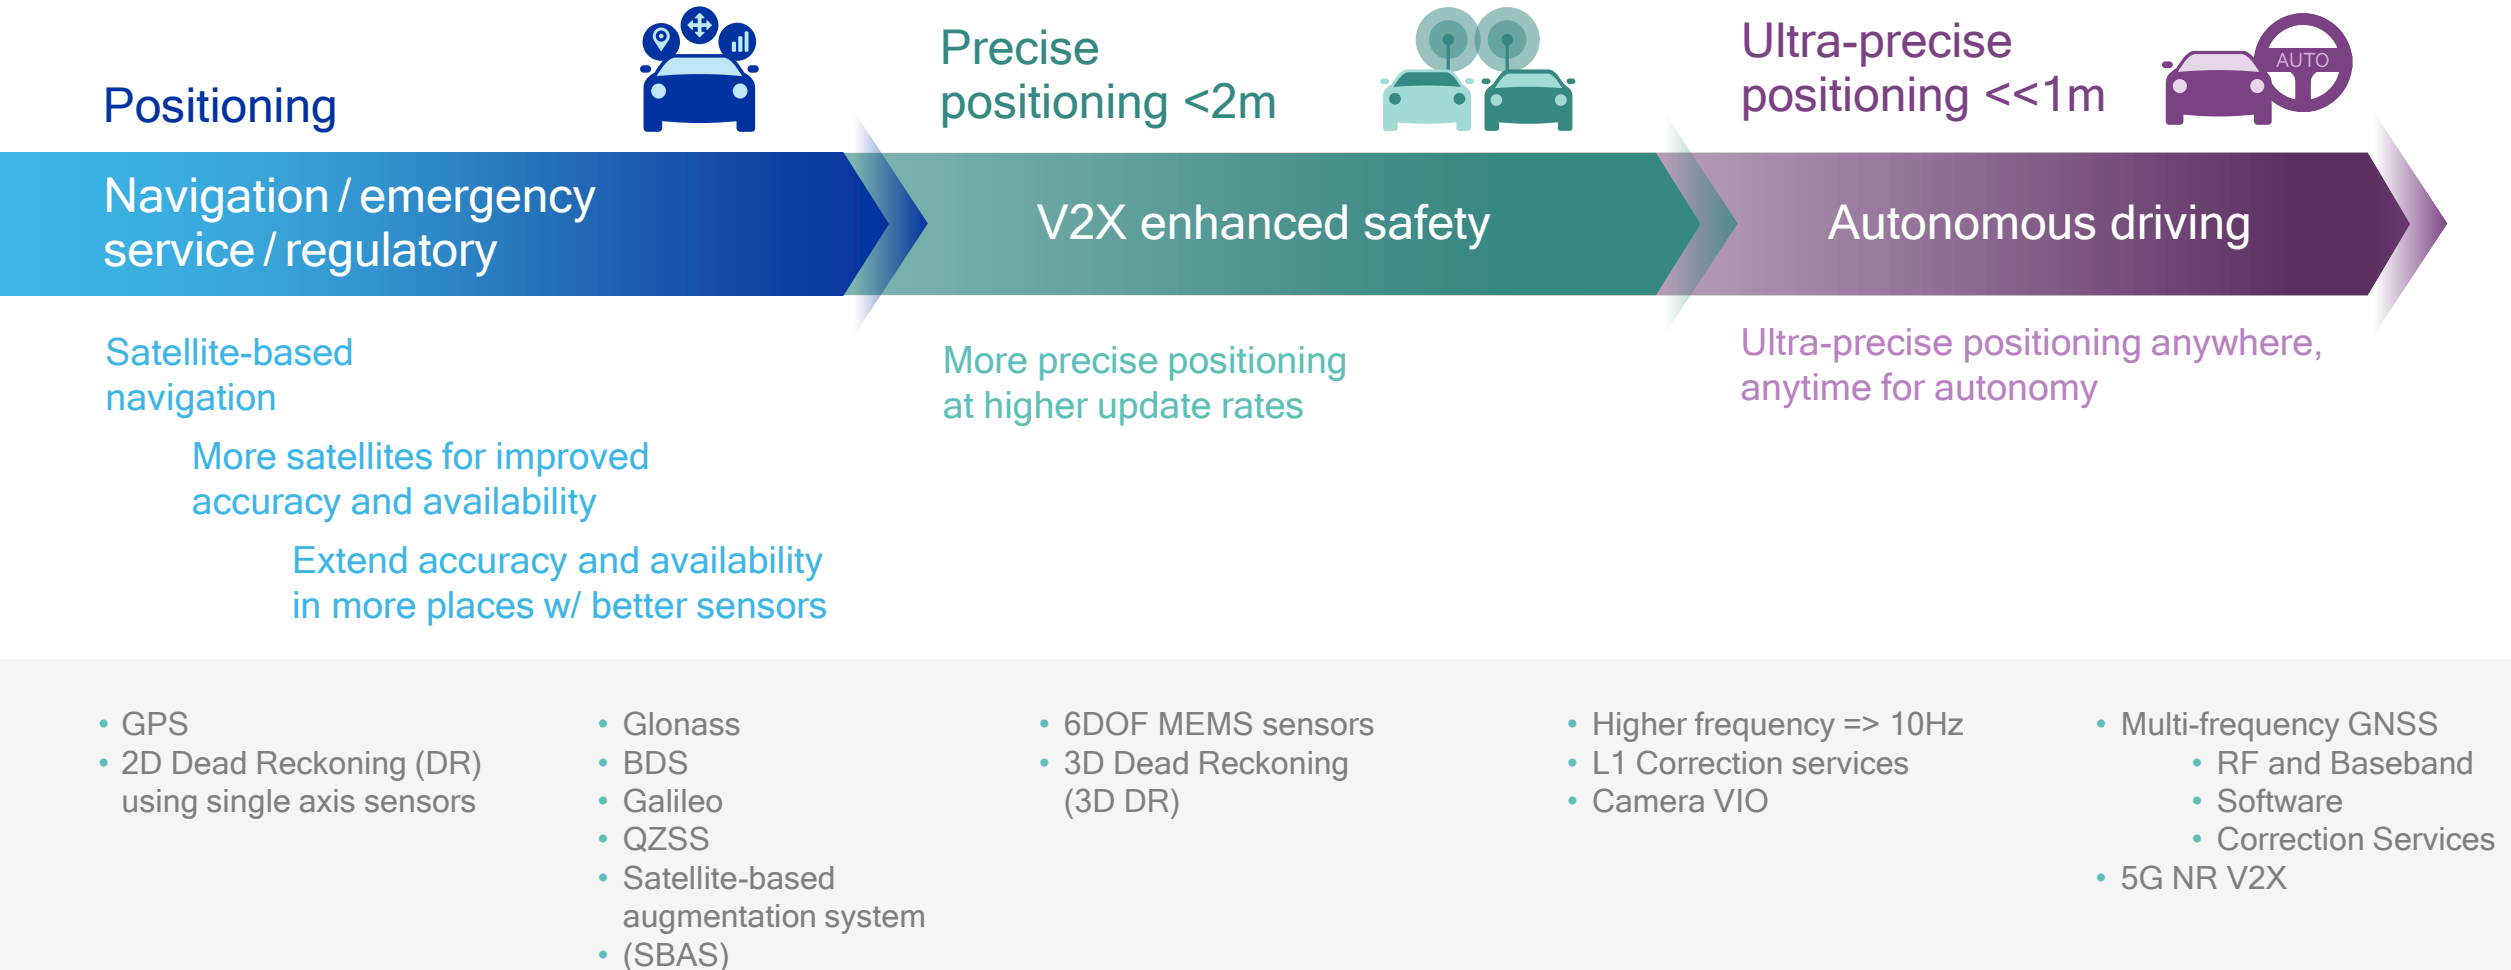



# On-board intelligence: C-V2X complements other sensors

Providing higher level of predictability and autonomy



## Radar

Bad weather conditions  
Long range  
Low light situations



## Camera

Interprets objects/signs  
Practical cost and FOV



## Lidar

Depth perception  
Medium range



## Ultrasonic

Low cost  
Short range

## ADAS Advanced Driver Assistance Systems



Brain of the car to help automate  
the driving process by using:

Immense compute resources

Sensor fusion

Machine learning

Path planning

## V2X wireless sensor

See-through, 360°  
non-line of sight sensing,  
extended range sensing



## 3D HD maps

HD live map update  
Sub-meter level  
accuracy of landmarks



## Precise positioning

GNSS positioning  
Dead reckoning  
VIO



# C-V2X Release 14 enhances range and reliability

---

Paving the path to autonomous driving





# C-V2X offers key advantages in multiple dimensions



Enhanced range  
and reliability



Reuse of DSRC/C-ITS  
higher layers



High density support



High speed support



Self managed for reduced  
cost and complexity



Leverage of cellular  
ecosystem



Synergistic with  
telematics platform



Strong evolution path  
towards 5G


# C-V2X defines two complementary transmission modes

## Network communications

V2N on “Uu” interface operates in traditional mobile broadband licensed spectrum

### Uu interface

e.g. accident 2 kilometer ahead

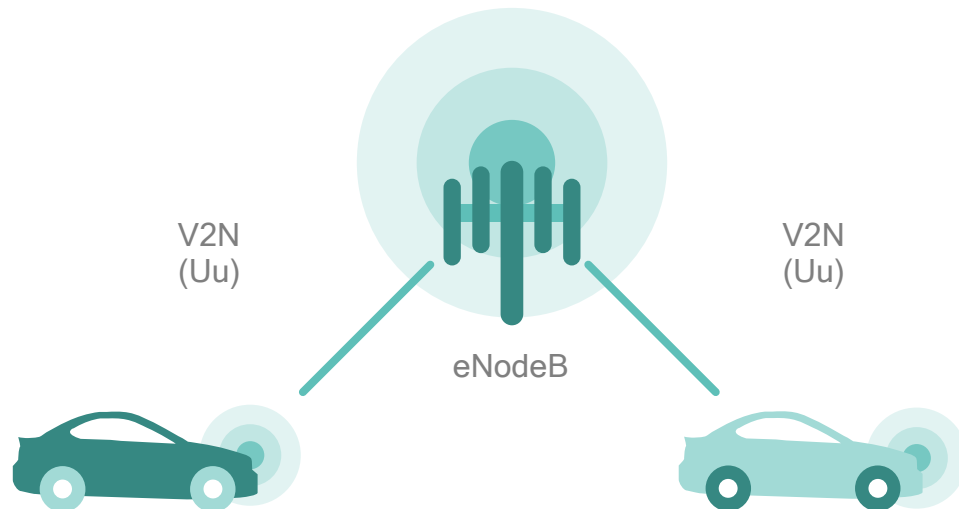


## Direct communications

V2V, V2I, and V2P on “PC5” interface<sup>1</sup>, operating in ITS bands (e.g. ITS 5.9 GHz) independent of cellular network

### PC5 interface

e.g. location, speed

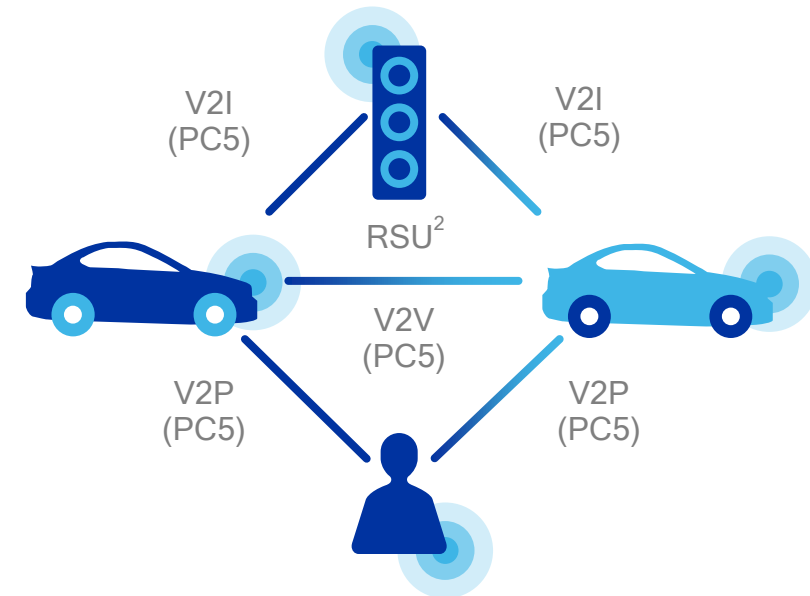


1. PC5 operates on 5.9GHz; whereas, Uu operates on commercial cellular licensed spectrum 2. RSU stands for roadside unit.




# Network communications for latency tolerant use cases


Suitable for telematics, infotainment and informational safety use case




Discover parking and charging

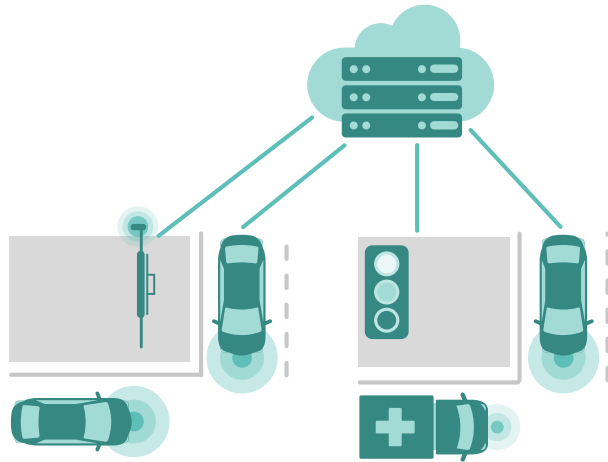

Cloud-based sensor sharing

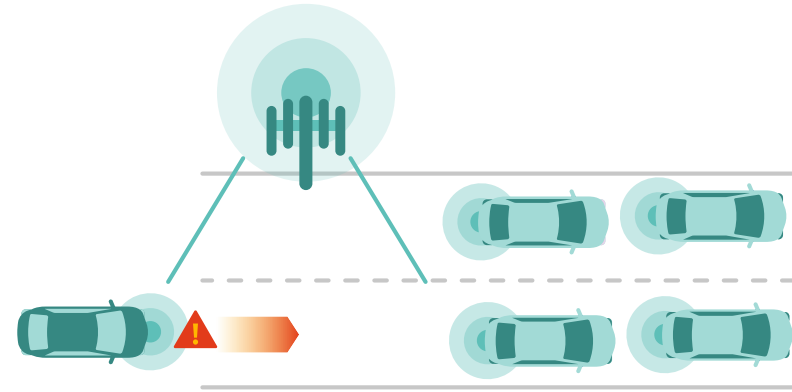


Traffic flow control/  
Queue warning

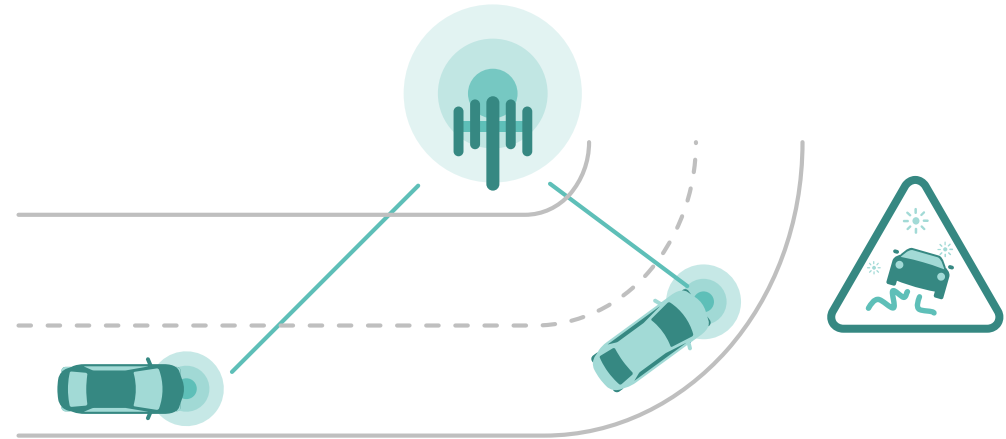


Road hazard warning 1 km ahead

# Direct communications for active safety use cases


Low latency communication with enhanced range, reliability, and NLOS performance

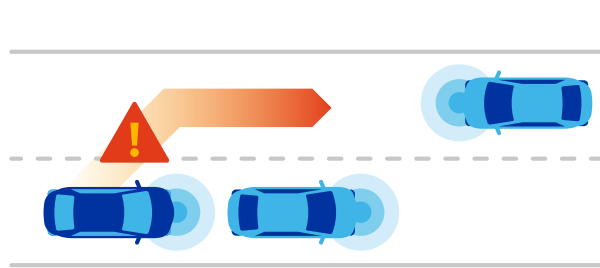


Do not pass  
warning (DNPW)

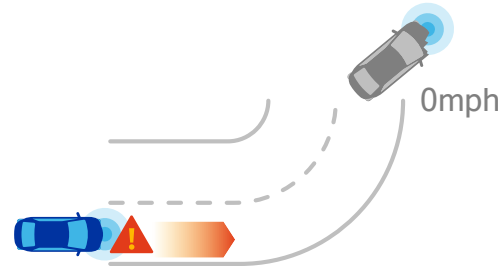

Blind curve/  
Local hazard warning

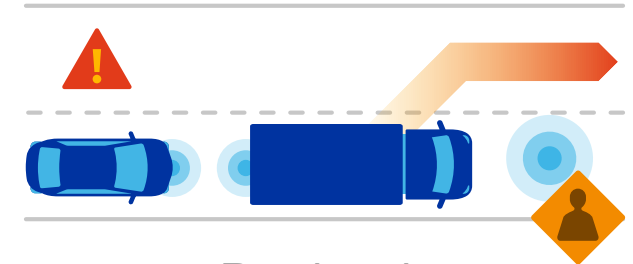


Road works  
warning

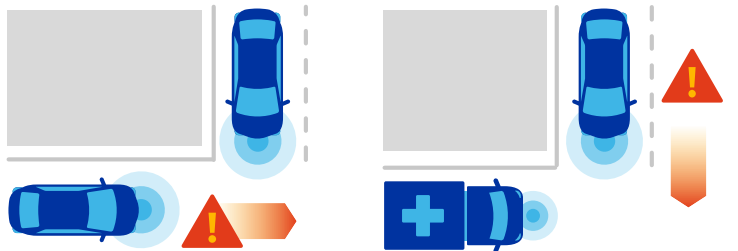

Intersection movement assist  
(IMA) at a blind intersection



Vulnerable road user (VRU)  
alerts at a blind intersection

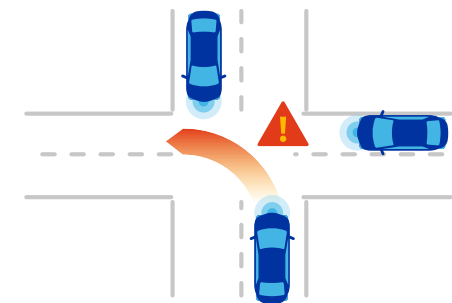

Left turn  
assist (LTA)

# C-V2X can work without network assistance<sup>1</sup>

V2V/V2I/V2P direct communications can be self managed

## USIM-less operation


C-V2X direct communications doesn't require USIM

## Autonomous resource selection

Distributed scheduling, where the car selects resources from resource pools without network assistance

## GNSS time synchronization

Besides positioning<sup>2</sup>, C-V2X also uses GNSS for time synchronization without relying on cellular networks

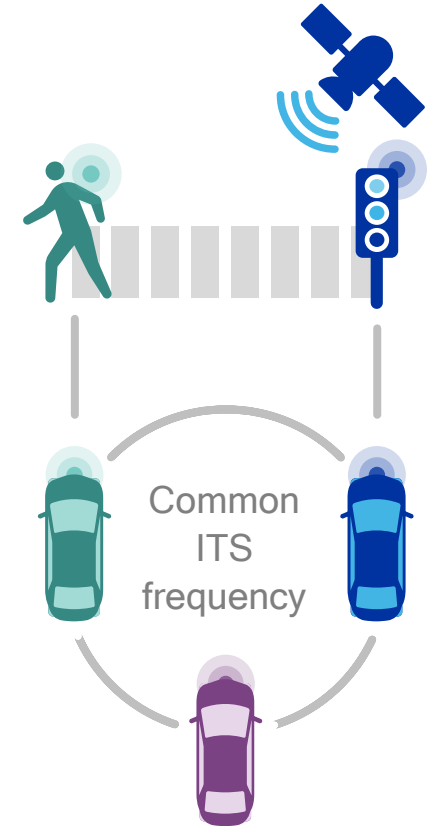

1. 3GPP also defines a mode, where eNodeB helps coordinate C-V2X Direct Communication; 2. GNSS is required for V2X technologies, including 802.11p, for positioning. Timing is calculated as part of the position calculations and it requires smaller number of satellites than those needed for positioning



# Advantages of self-managed over network-assisted

## Reduced cost

Doesn't use prime licensed spectrum for control, no additional network investment


## Increased reliability

Doesn't rely on network coverage, doesn't suffer from service interruption during handover


## Reduced complexity

Doesn't rely on coordination between operators for resource assignment, doesn't require subscription

Self-managed  
(no network assistance)

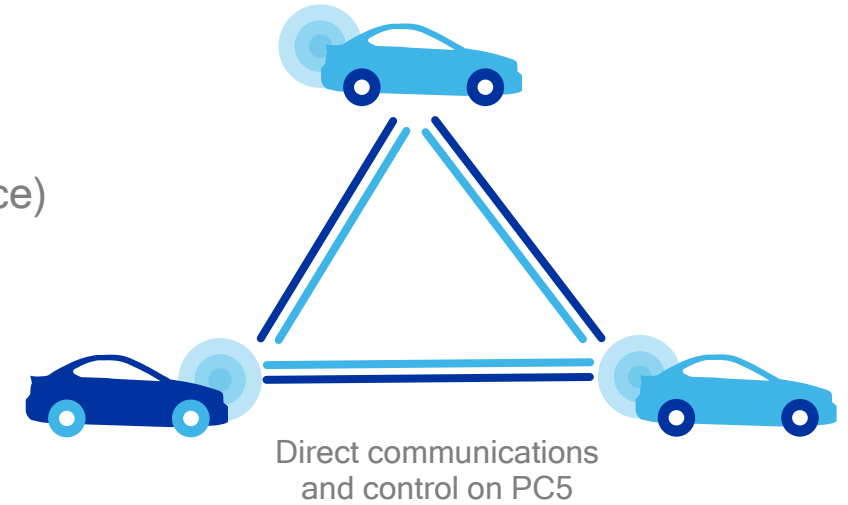

Network-assisted

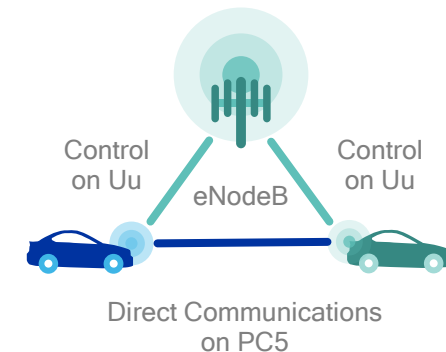

# C-V2X is designed to work in ITS 5.9 GHz spectrum

For vehicles to talk to each other on harmonized, dedicated spectrum

## 3GPP support of ITS 5.9 GHz band


C-V2X support in ITS band was added in 3GPP Release 14

## Harmonized spectrum for safety

C-V2X uses harmonized/common, dedicated spectrum for vehicles to talk to each other

## Coexistence with 802.11p


C-V2X and 802.11p can co-exist by being placed on different channels in the ITS band

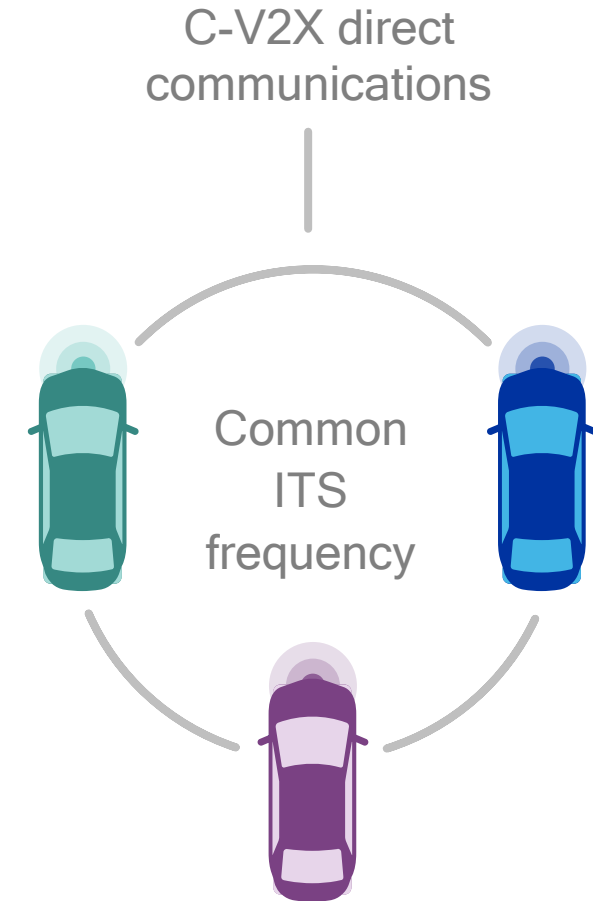

# Fully leveraging ITS 5.9 GHz band for 5G V2X services

Supporting today's basic safety, and tomorrow's advanced use cases

## Example 5.9 GHz

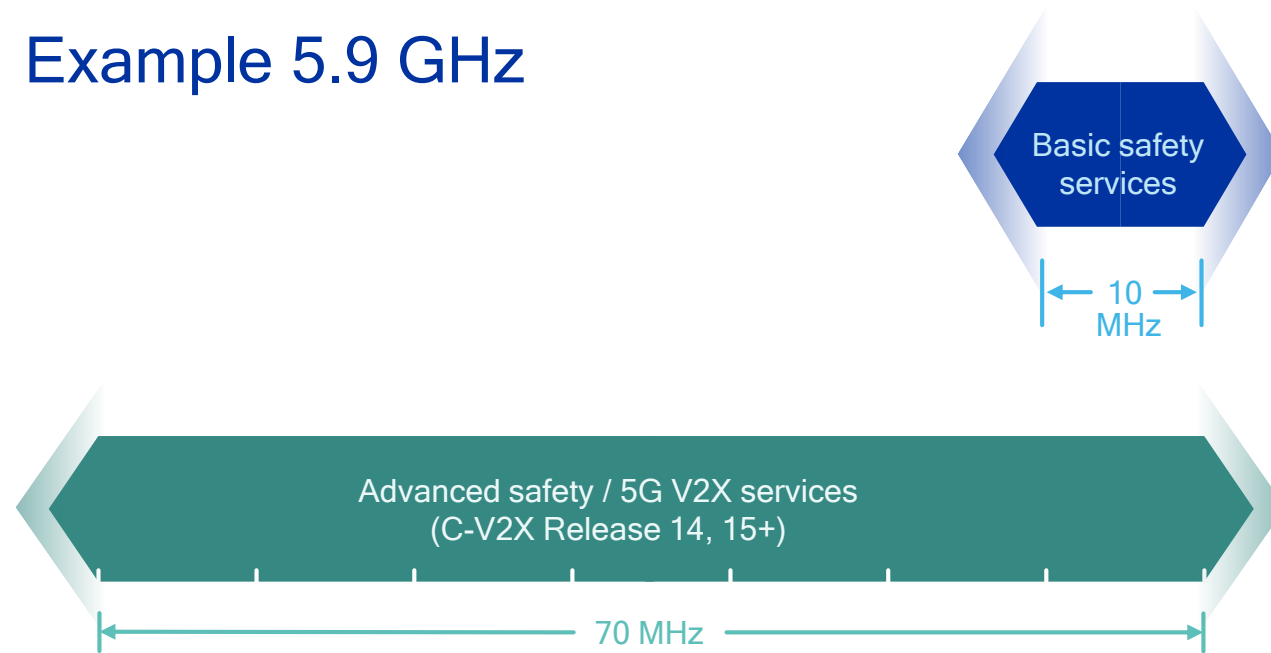

C-V2X Rel-15+ can operate in the same Rel-14 spectrum

# 10MHz


Support today's safety use cases on small subset of the band (using 802.11p or C-V2X)

# 70MHz

In addition to basic safety, support advanced safety services (e.g. higher bandwidth sensor sharing and wideband ranging/positioning)



# C-V2X reuses upper layers defined by automotive industry

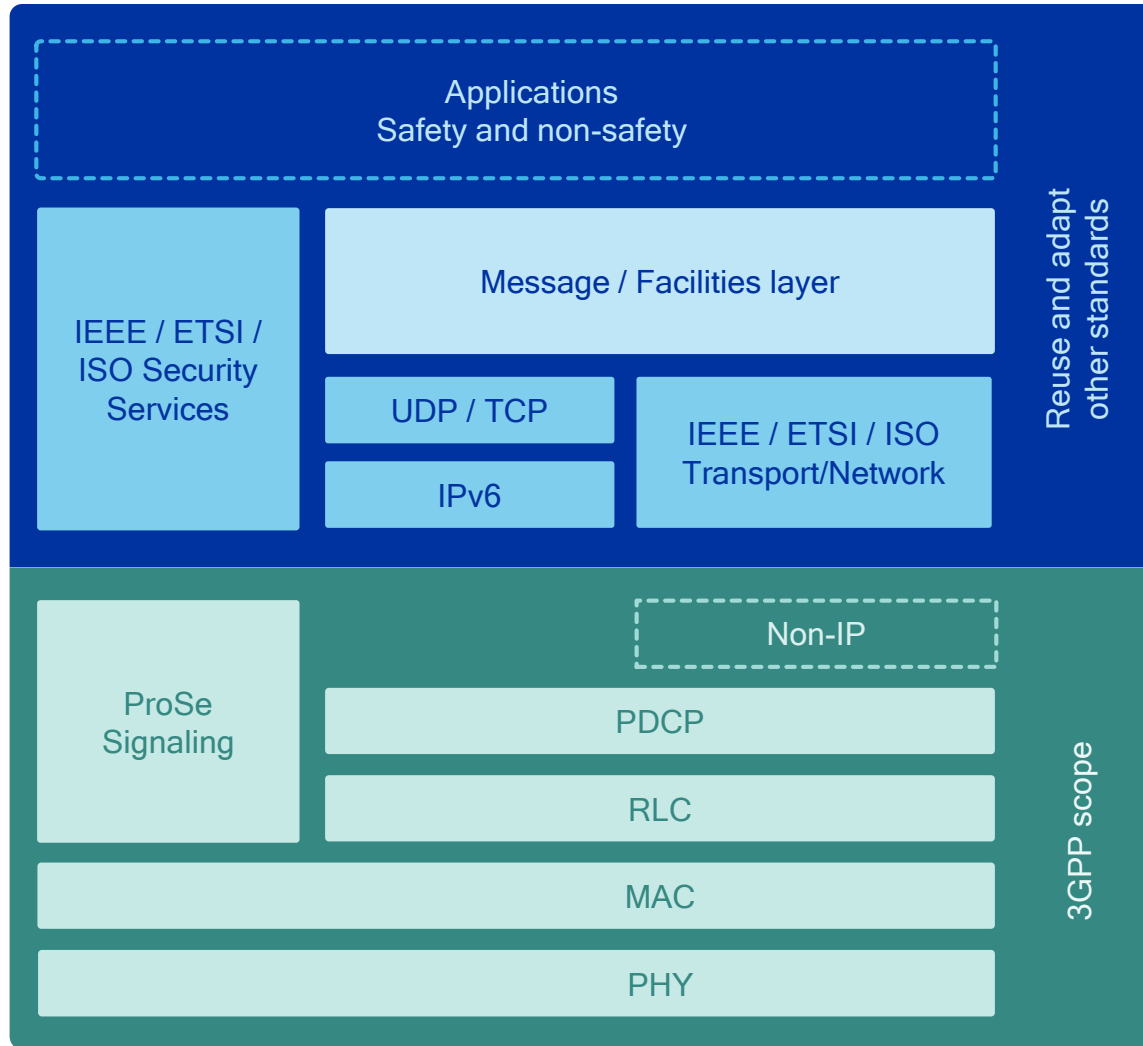

## Reuse of DSRC/C-ITS established service and app layers

- Already defined by automotive and standards communities, e.g. ETSI, SAE
- Developing abstraction layer to interface with 3GPP lower layers (in conjunction with 5GAA)

## Reuse of existing security and transport layers

- Defined by ISO, ETSI, and IEEE 1609 family

## Continuous enhancements to the radio/lower layers

- Supports the ever-evolving V2X use cases

# C-V2X reduces vehicle communications complexity and cost

## Most optimal platform

Takes advantage of already planned embedded modem installation in vast majority of new vehicles

## Cost efficient solution

Leverages mobile ecosystem and existing engineering know-how, resources and solutions

## Strong evolution path


Keeps technology relevant to new use cases by avoiding one-off technology lifecycle obsolescence



# C-V2X reduces cost of infrastructure deployment


Combined RSUs and 4G/5G small cell, benefiting from cellular network densification

- 4G/5G small cells with Uu interface
- RSUs with direct link/PC5 interface

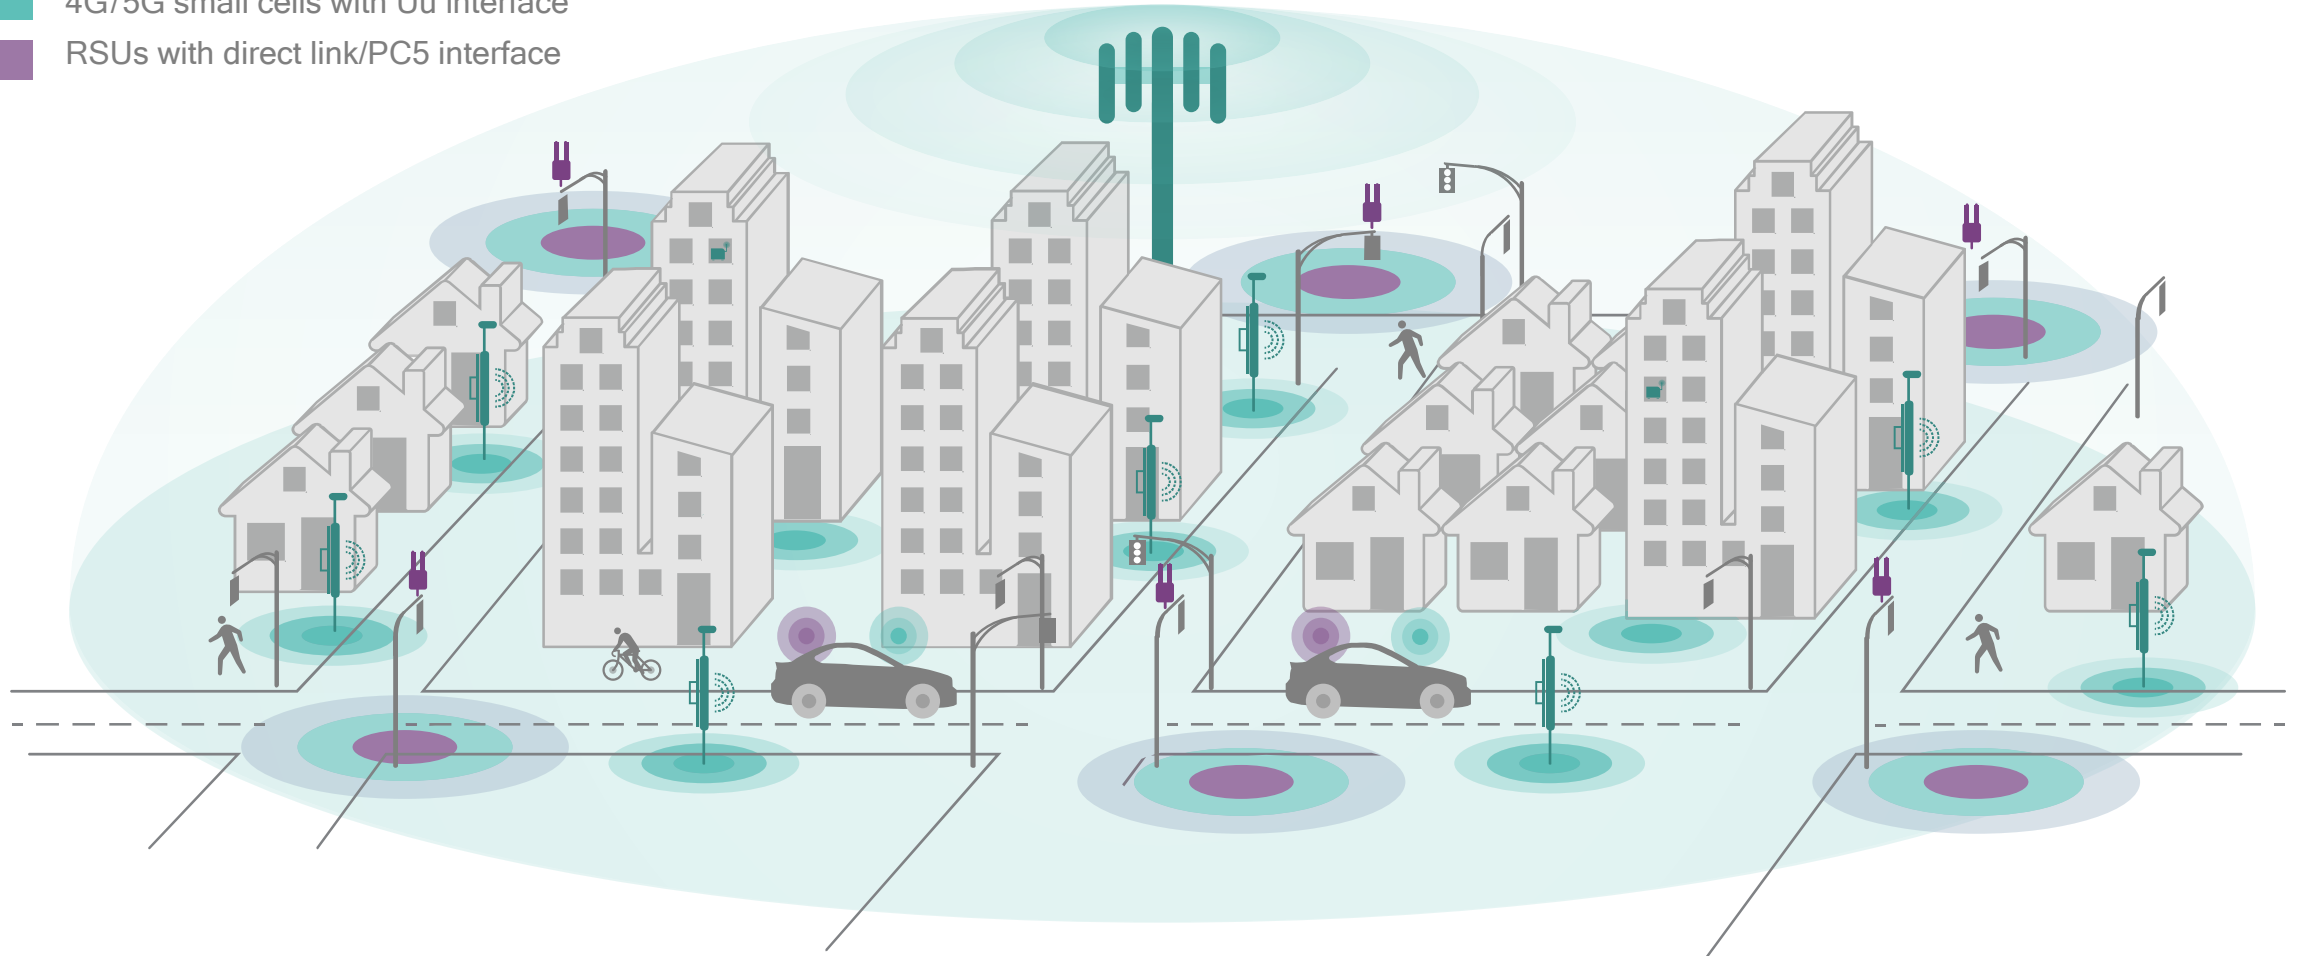


# C-V2X offers new business models and economic benefits

Leveraging existing, ubiquitous cellular networks and mobile ecosystem support




## More integrated solution

C-V2X functionality can be integrated in vehicle's modem to enable most optimal platform



## Reduced deployment cost

Combined RSU and eNodeB infrastructure synergies provide economic benefits



## Mobile ecosystem expertise

Benefits from cellular player's extensive experience in deploying, managing, and maintaining complex communication systems



## New services and business opportunities

Leverages unified C-V2X / telematics offerings and addresses new services for shared mobility and autonomous driving



# C-V2X Performance Advantage

---



# C-V2X Rel-14 has significantly better link budget than 802.11p<sup>1</sup>

Leading to longer range (~2X range)—or more reliable performance at the same range

**Transmission time**  
Longer transmit time leads to better energy per bit



**Waveform**  
SC-FDM has better transmission efficiency



**Channel coding**  
Gains from turbo coding and retransmission

Energy per bit is accumulated over a longer period of time for C-V2X

SC-FDM allows for more transmit power than OFDM for the same power amplifier

Coding gain from turbo codes and HARQ retransmission lead to longer range



**~2X**  
Longer range

1. Link budget of C-V2X is around 8 dB better than 802.11p


# Longer transmission time: leads to link budget gain

Usage of FDM in C-V2X provides an advantage compared to TDM in 802.11p

## Example<sup>1</sup>

4.8dB (3X)

Gain per packet for C-V2X

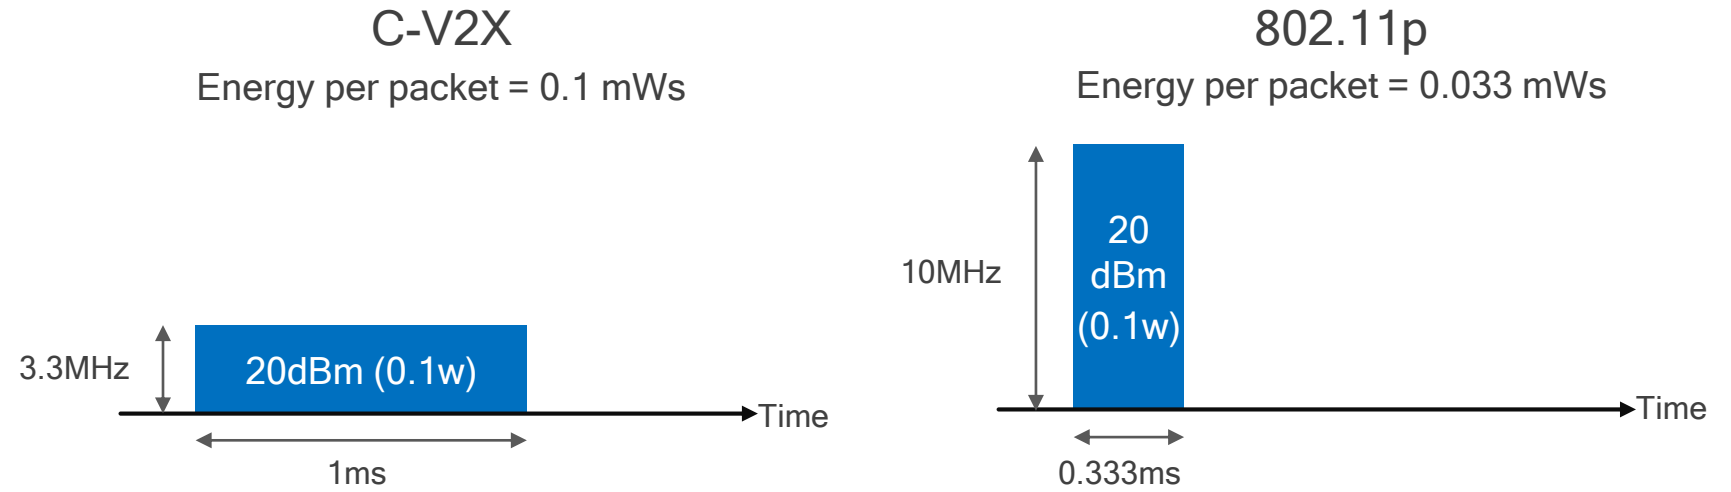


- C-V2X has longer transmission time for the same number of transmitted bits, leading to better energy per bit (as energy is accumulated over a longer period of time)
- FDM transmission has been adopted as an efficient mode of packet transmission in 4G cellular systems

1. Assumptions: 190 bytes packet size, 1/2 rate coding for 802.11p, 0.444 rate coding for C-V2X, QPSK modulation used for both 802.11p and C-V2X,

# SC-FDM Waveform: better transmission efficiency

Providing 2dB better transmission efficiency than OFDM, with the same PA<sup>1</sup>

SC-FDM's higher average power due to its lower PAPR<sup>2</sup>

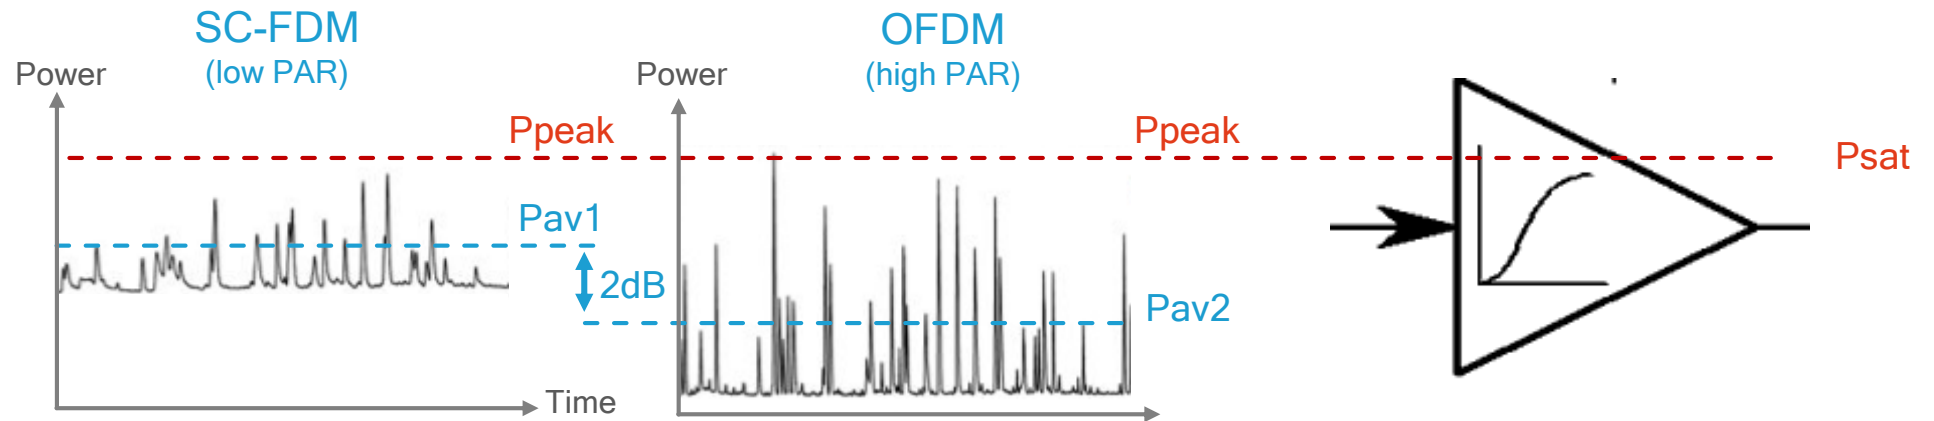

- SC-FDM groups resource blocks together in a way that reduces peak-to-average power ratio (PAPR), hence support driving power amplifier closer to saturation, leading to better transmit power efficiency
- Used for LTE uplink and 5G macro deployments, where transmit power efficiency is particularly important


<sup>1</sup> At 0.1% peak-to-average-ratio Complementary Cumulative Distribution Function (CCDF) operating point; 2. Power graphs used to illustrate the point and are not based on real data nor drawn to scale



# Channel Coding: TC provides $\sim 2\text{dB}$ coding gain over CC

Providing 2dB better transmission efficiency at the same PA


The required SNR for receiving a specific packet size with 1% block error rate is 2dB lower with TC than CC

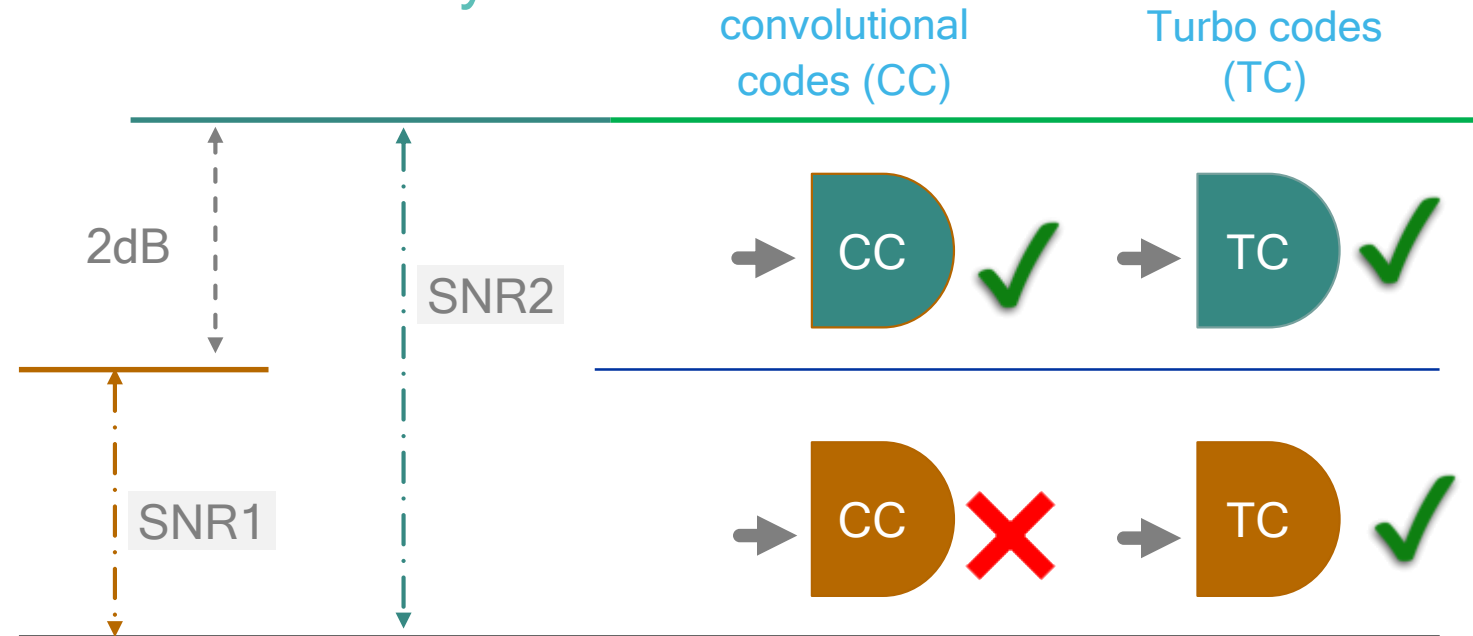

- C-V2X uses the more modern turbo codes (TC), while 802.11p uses K=7 convolutional codes (CC)
- TC used for Wi-Fi evolution (11.ac) and in 3G/4G to reduce bit error rate

# Freeway scenarios: Simulation assumptions

Freeway drop is used to simulate high speed performance

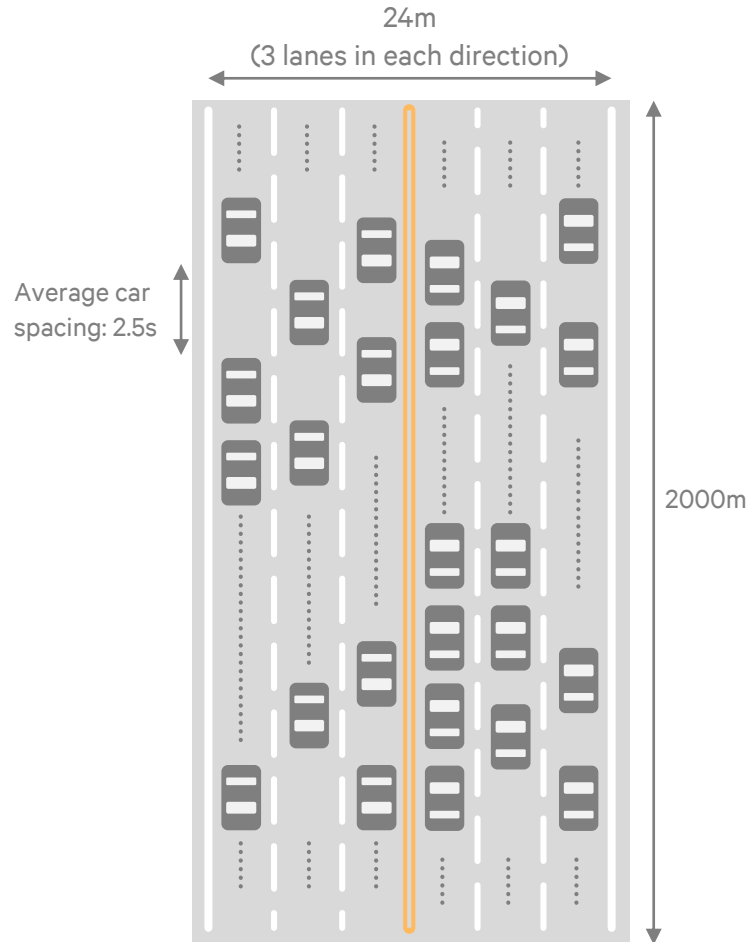


## Simulation assumptions:

- 6 lanes for 4m each, 3 lanes in each direction
- Three speeds => 250 km/hr, 140 km/hr, 70 km/hr
- Cars dropped according to Poisson process, avg. car spacing is 2.5s  
69, 123, 246 cars
- All cars are LOS
- Actual mobility simulated: correlated shadowing, independent fading
- Packet transmission periodicity:  
140, 250 km/hr => 100ms; 70 km/hr => 200ms


# Enhanced range and reliability in free way scenarios

~100% gain in distance at 0.9 PRR; @400m PRR changed from 0.02 to 0.6

Freeway 250 km/hr, 69 cars

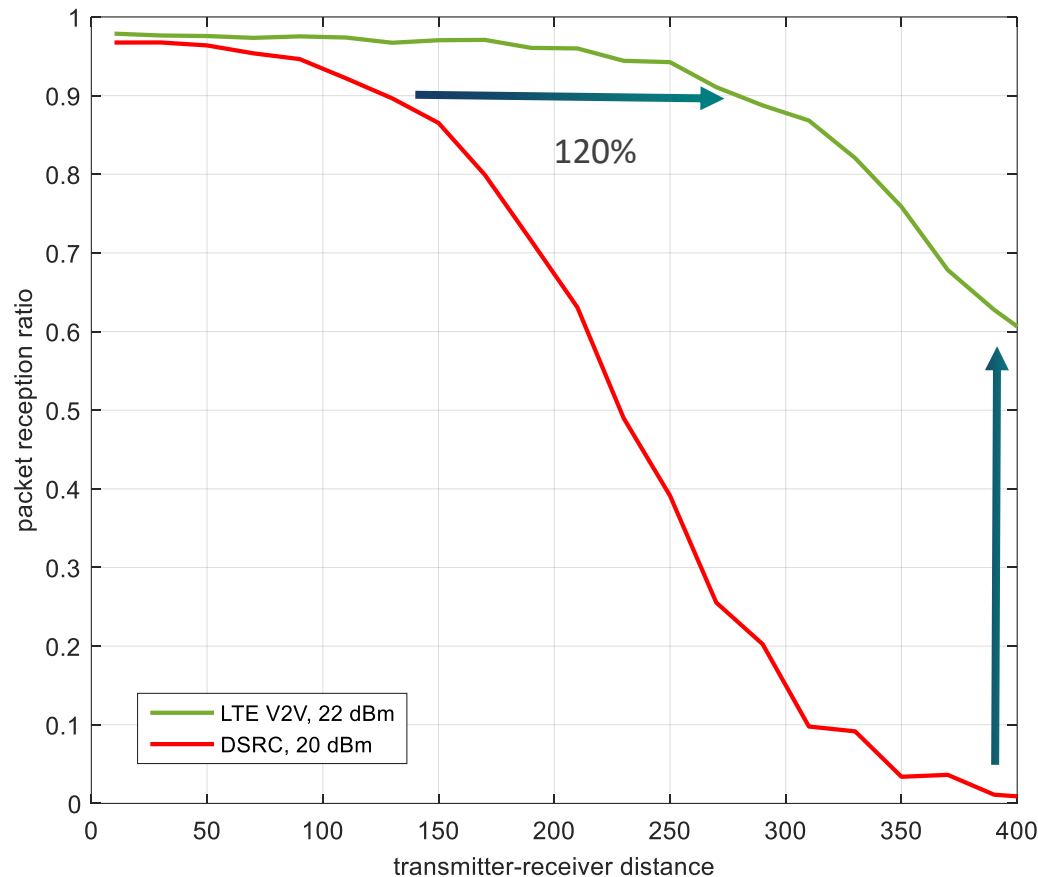


Freeway 140 km/hr, 123 cars

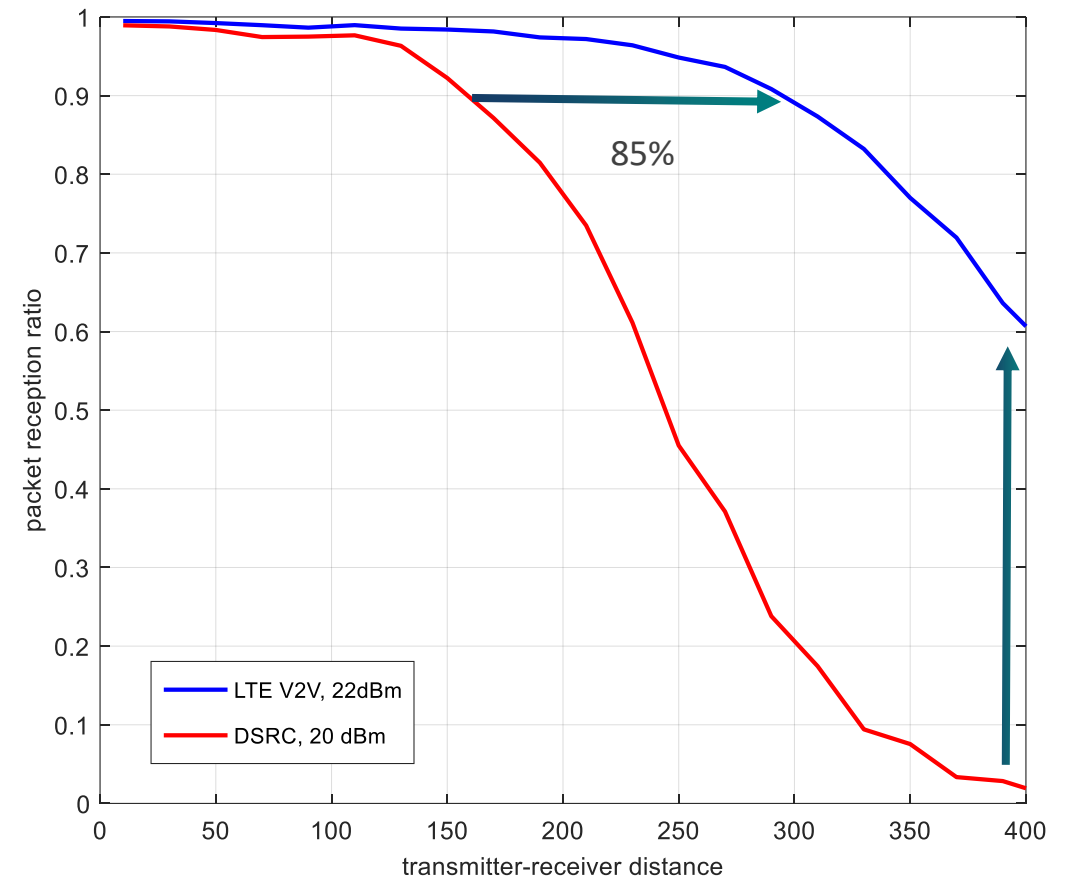

# Enhanced range and reliability: Free way 70 km/hr speed


~60% gain in distance at 0.9 PRR; @400m PRR changed from 0.02 to 0.58

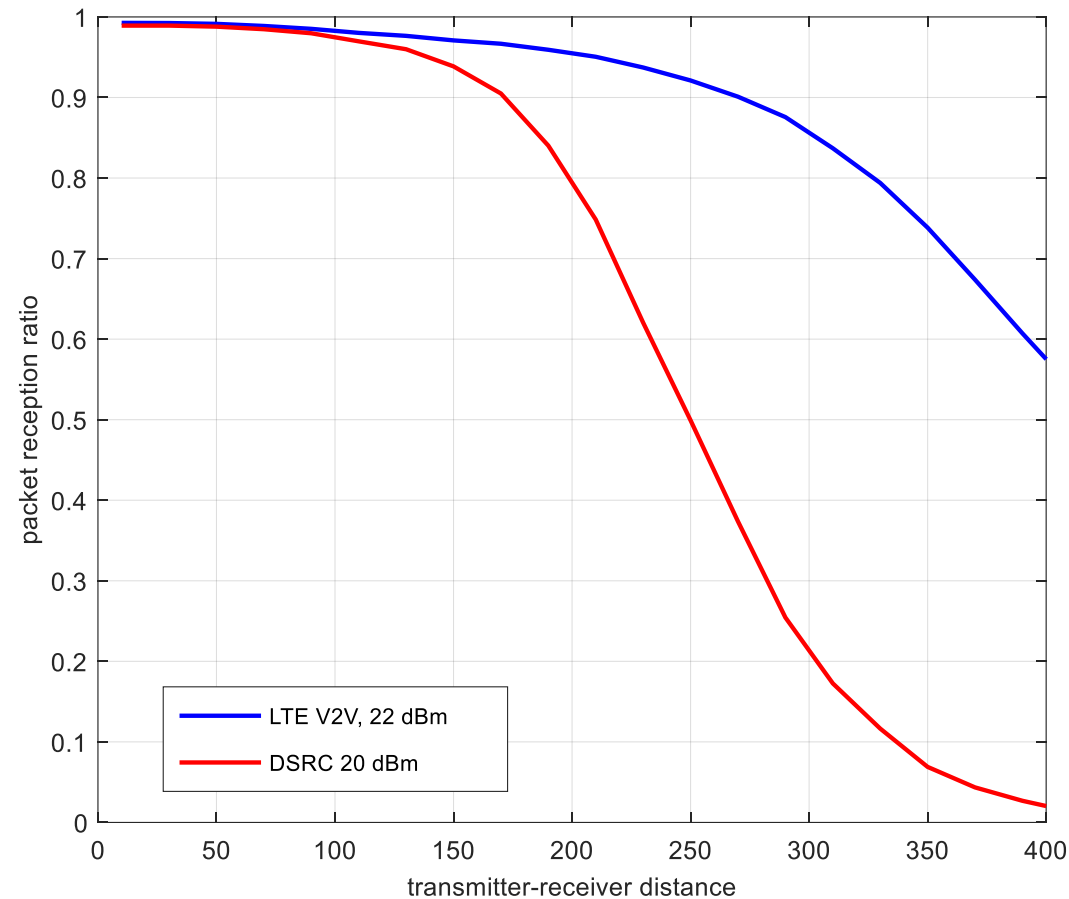



# Urban Scenarios: Simulation assumptions

Urban drop is used to simulate high density drops

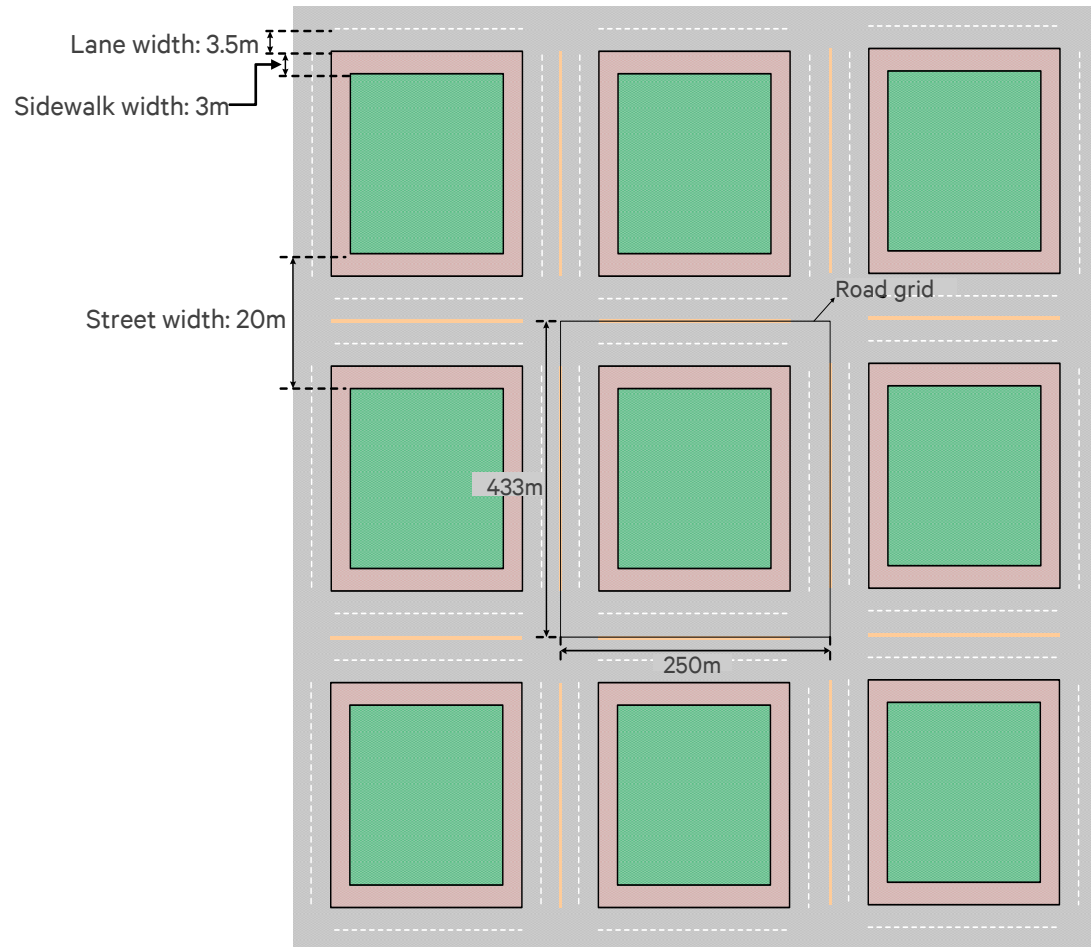


## Simulation assumptions:

- 4 lanes for 3.5m each, 2 lanes in each direction
- Speeds: 15km/hr, 60 km/hr
- Cars dropped according to Poisson process, avg. car spacing is 2.5s  
590, 2360 cars
- Packet transmission periodicity:  
60 km/hr => 250ms; 15 km/hr => 1000ms
- LOS on same road, NLOS on cross roads
- Actual mobility simulated:
  - Correlated shadowing, independent fading
  - Turn left/right with probability 0.25
- Other parameters same as freeway drop


# Enhanced range and reliability: Urban 60 km/hr, 15 km/hr

~ 30% gains at 0.9 PRR; Gains muted due to challenging pathloss model

Urban 60 km/hr, 590 cars

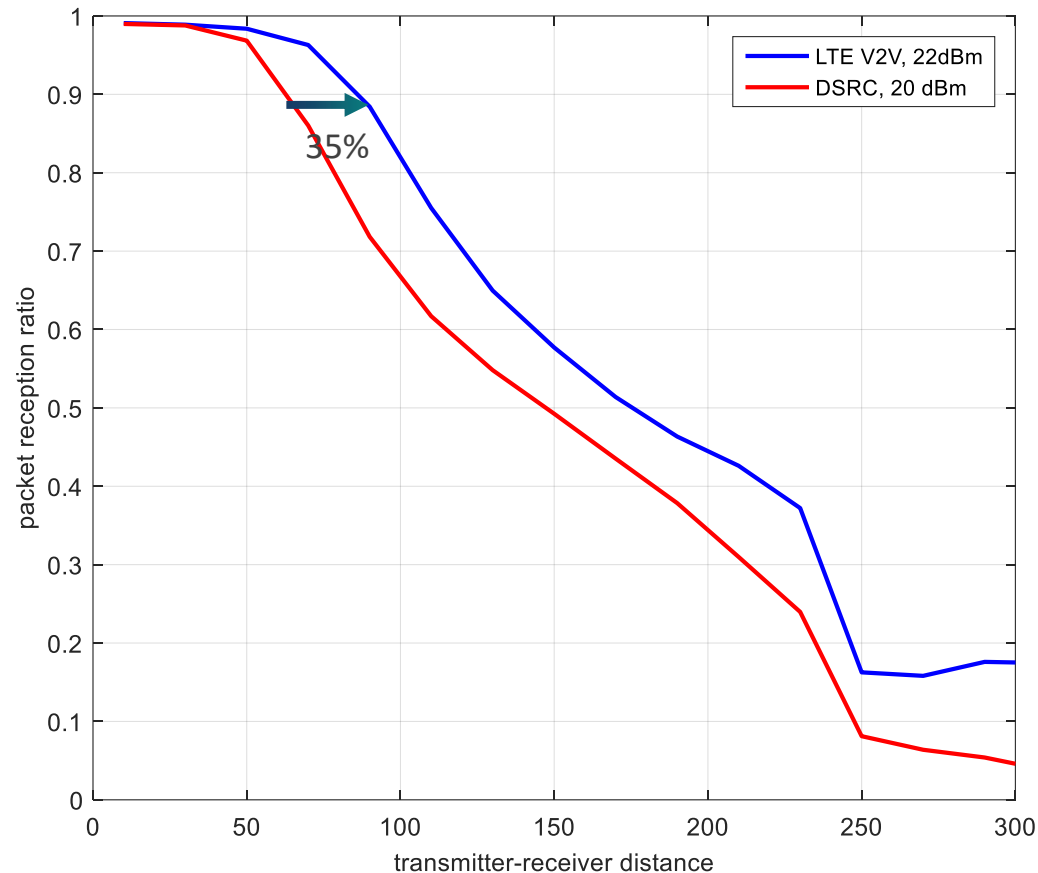


Urban 15 km/hr, 2360 cars

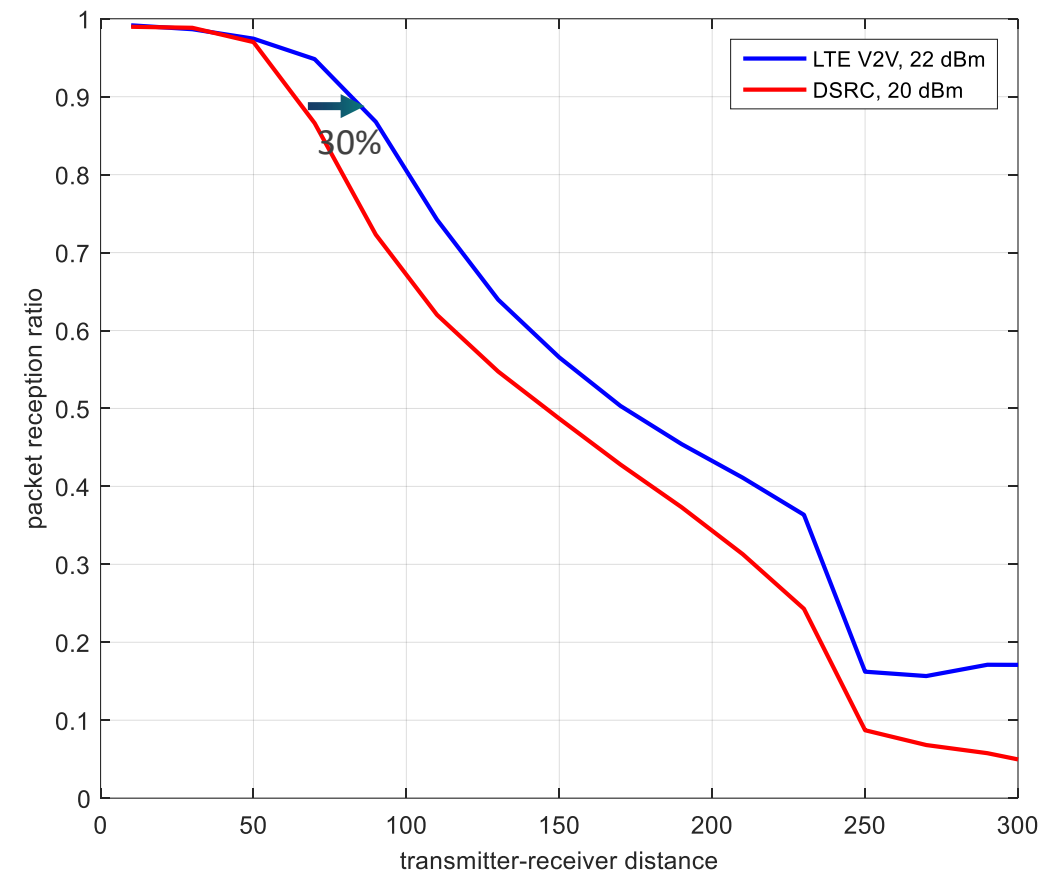

# C-V2X is designed for high density vehicle deployments

## Guaranteeing low latency access for safety critical messages even at high density

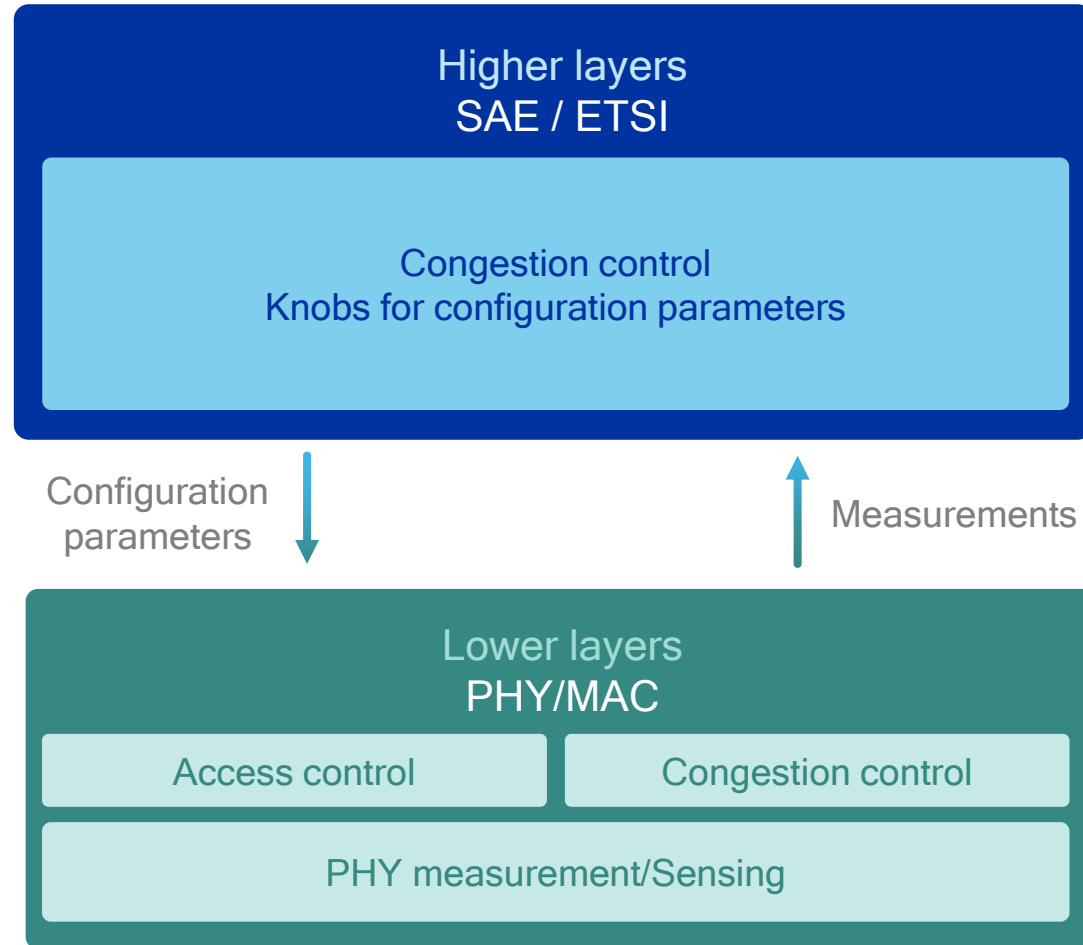

Leveraging higher layers to tune congestion control parameters

Enhanced performance with MAC/PHY congestion control


Deterministic access control and resource scheduling in PHY/MAC

# Deterministic access control and resource scheduling

Chooses blocks with lowest energy levels to meet latency requirements


1

Measure relative energy of next “n” resources

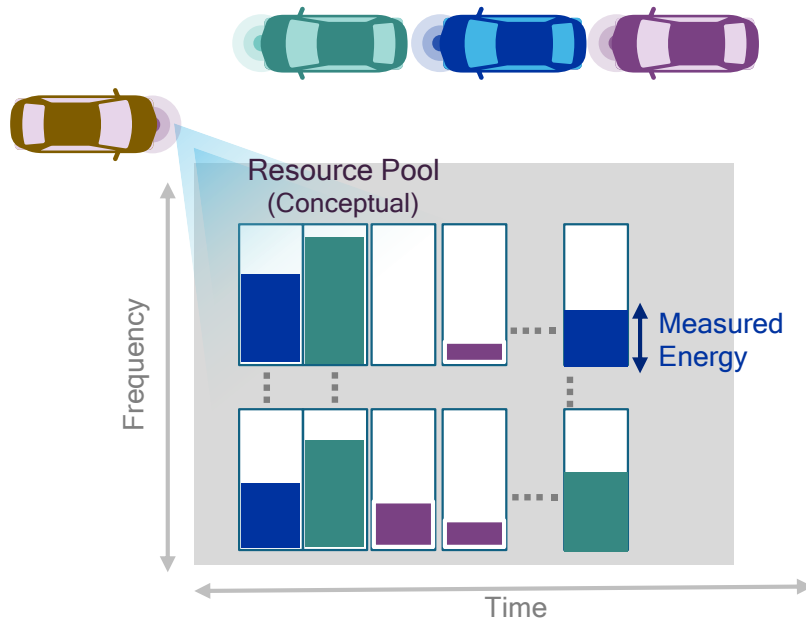


2

Rank the resources according to the measured energy

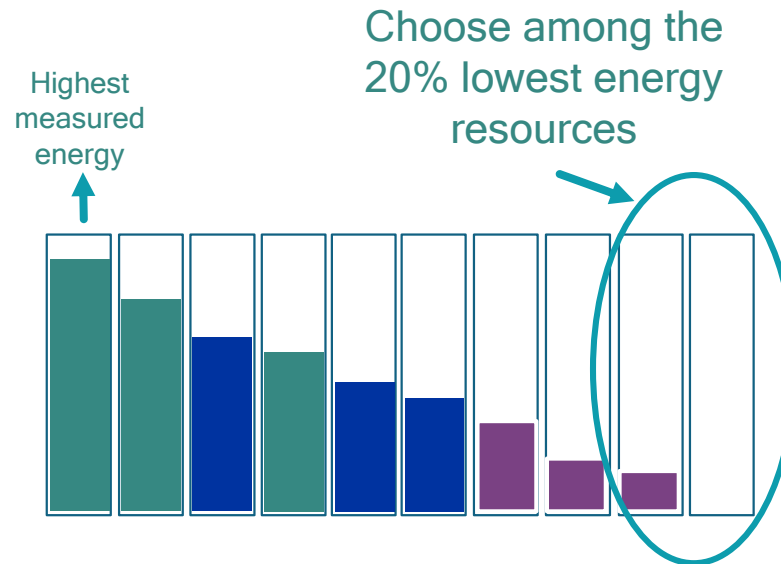

3

Choose one of the lowest energy blocks for transmission

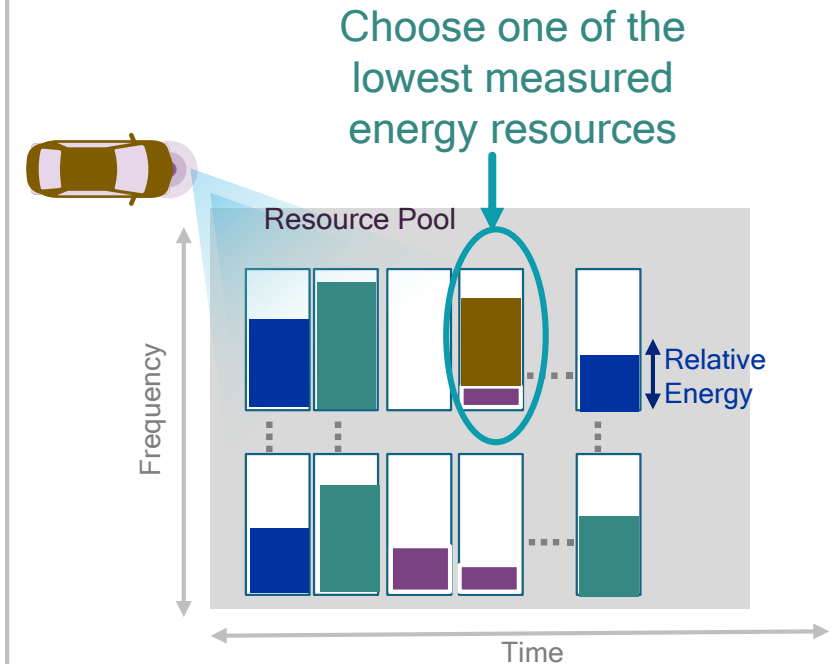

# C-V2X access control advantages over 802.11p

System keeps on scaling

## Optimized resource scheduling


By choosing the lowest relative energy blocks

## Does not get denied access

Two cars far apart from each other can use same resources

## Designed to meet latency requirements

By scheduling and obtaining access to resources in timely manner

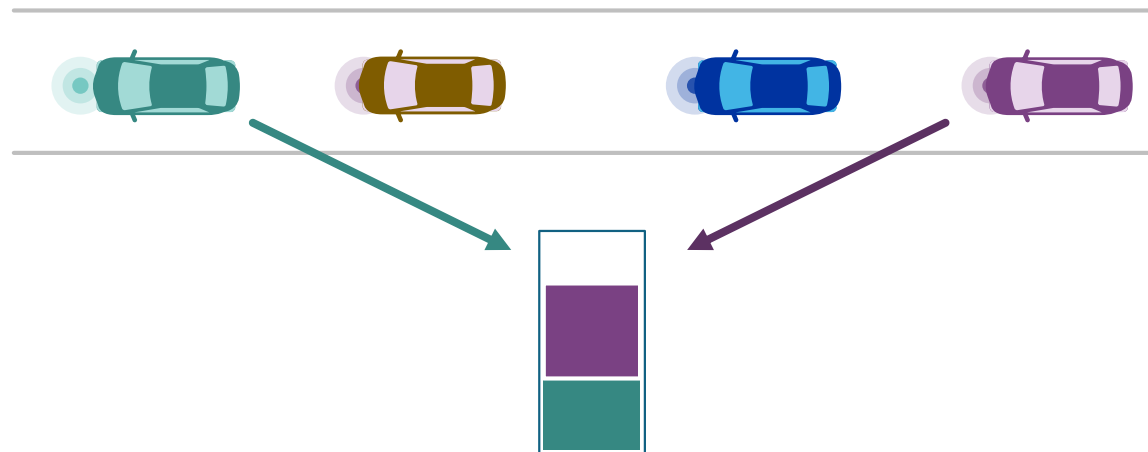





# Improved reliability at higher vehicle speeds

## Disabled vehicle after blind curve use case example


### Icy road condition

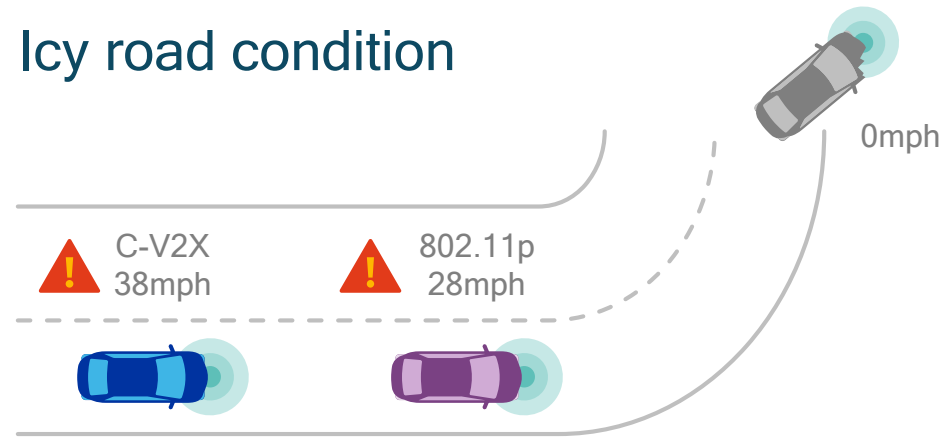

### Normal road condition

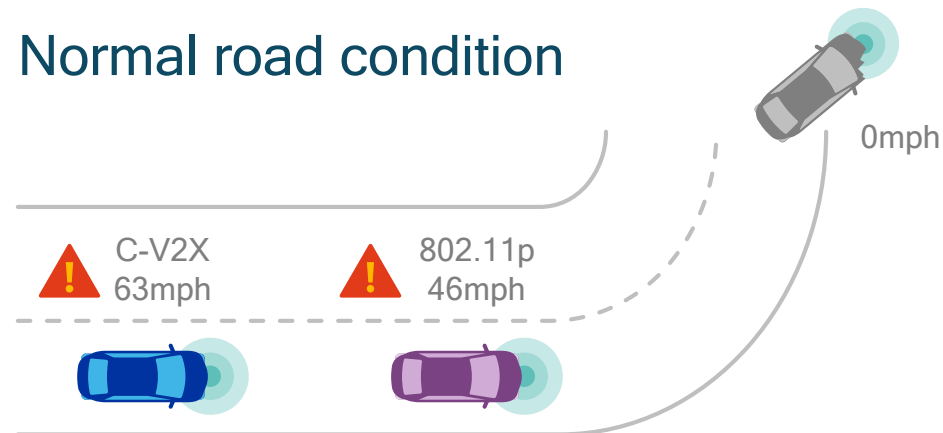

### Stopping distance estimation<sup>1</sup> (Driver reaction time + braking distance)

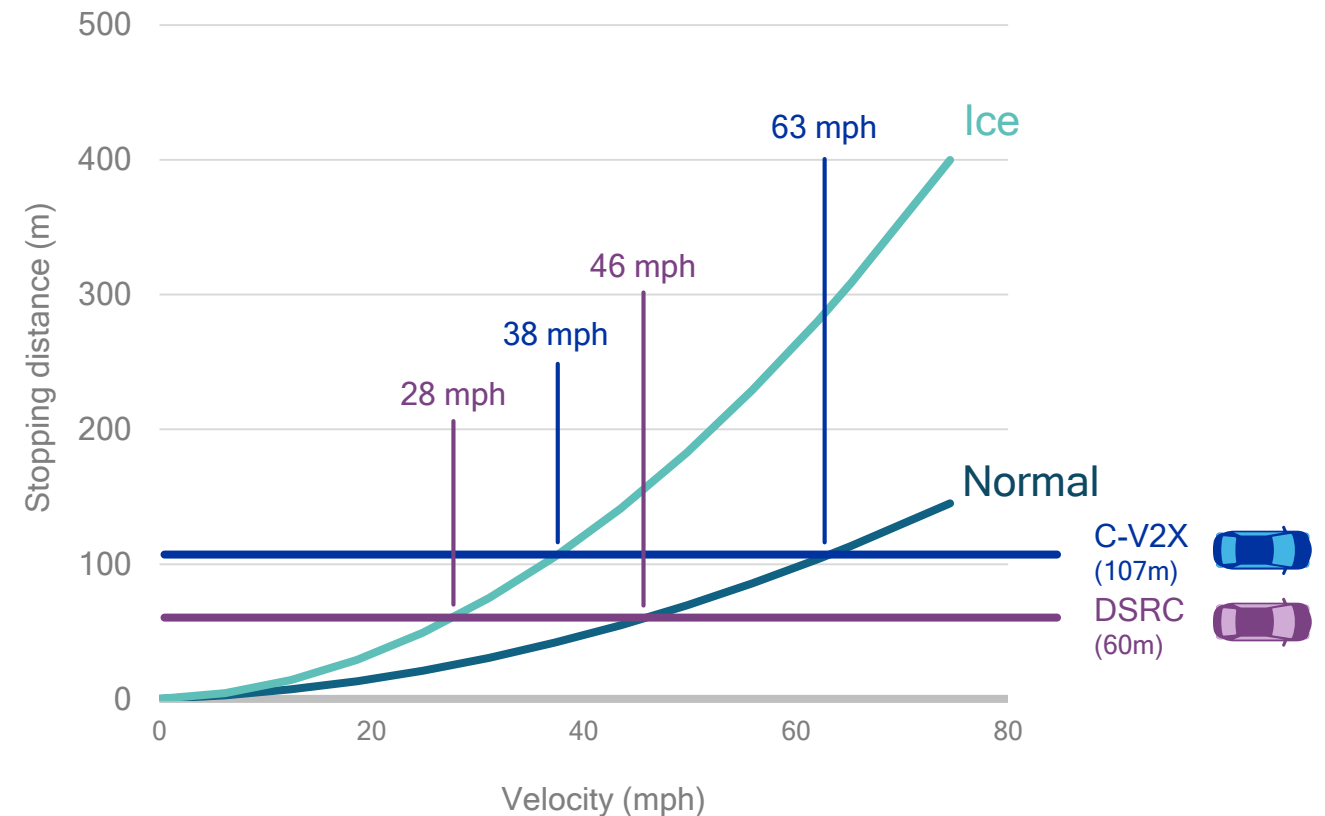


1. "Consistent with [CAMP Deceleration Model](#) and [AASHTO "green book"](#);


# Improved reliability at higher speeds and longer ranges

## Do not pass warning (DNPW) use case example


### C-V2X

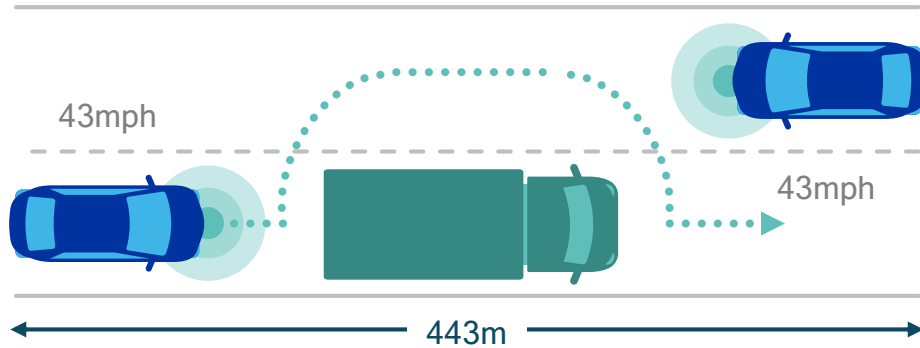

### 802.11p

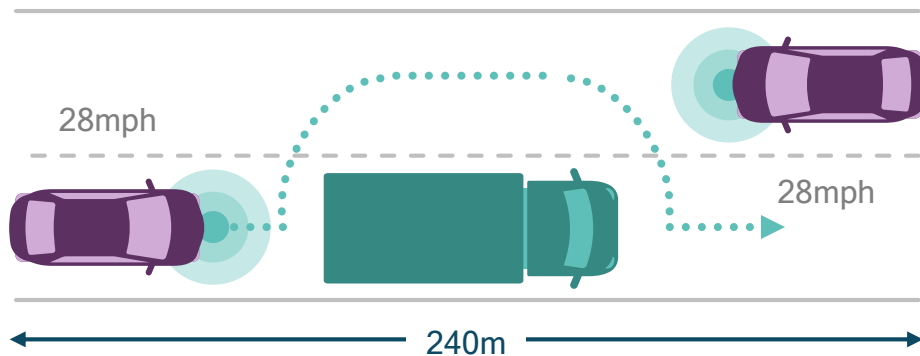

### Required passing alert distance (m) vs. speed (mph)<sup>1</sup>

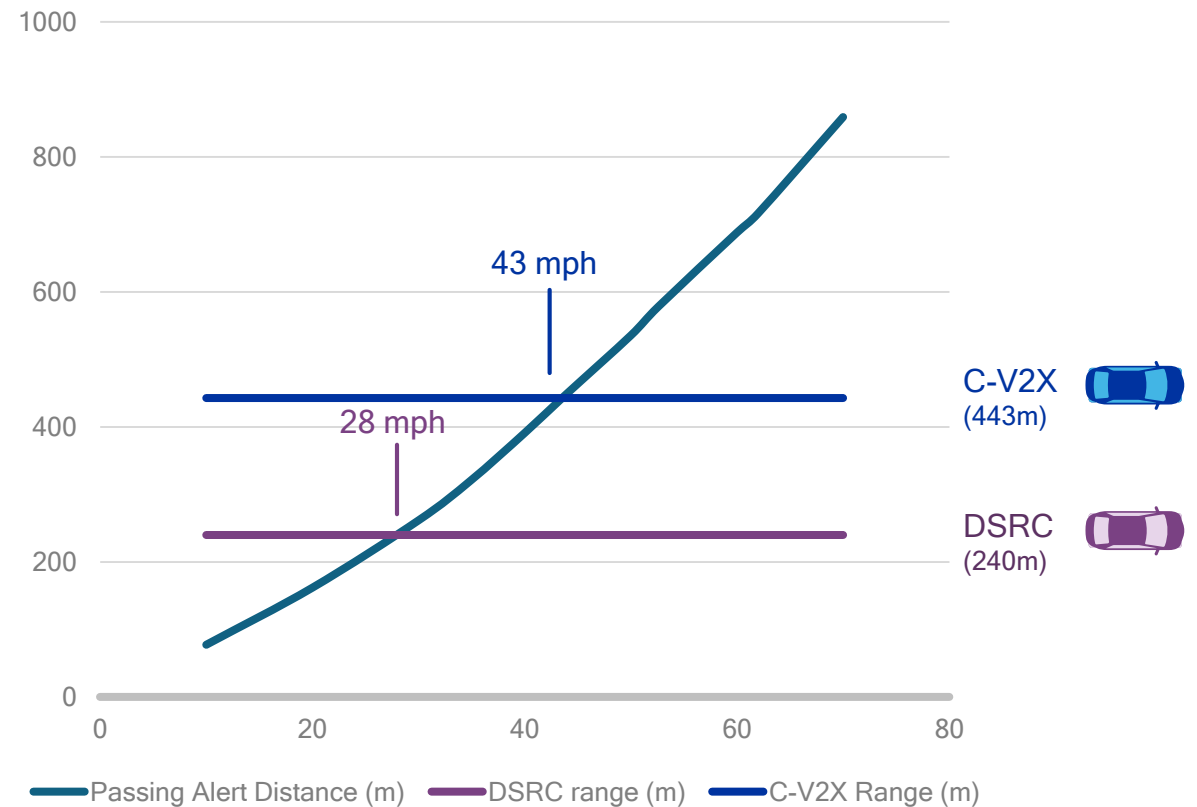

1. Calculations based on [AASHTO "green book"](#)







# Comparison: Technology operation [www.cargeek.ir](http://www.cargeek.ir)

Technology operation	802.11p	C-V2X Rel-14/15	C-V2X Rel-16 (expected design)
<b>Specification completed</b>	Completed	Rel-14 completed in 2016. Rel-15 to be completed in 2018	2019
<b>Support for low latency direct communications</b>	✓	✓ (Rel-14 – 4ms)	✓ (≤ 1ms)
<b>Support for network communications</b>	Limited (via APs only)	✓	✓
<b>Can operate without network assistance</b>	✓	✓	✓
<b>Can operate in ITS 5.9 GHz spectrum</b>	✓	✓	✓
<b>SIM-less operation</b>	✓	✓	✓
<b>Security and privacy on V2V/V2I/V2P</b>	✓ (as per IEEE WAVE and ETSI-ITS security services)	✓ (as per IEEE WAVE and ETSI-ITS security services)	✓ (as per IEEE WAVE and ETSI-ITS security services)
<b>Security/Privacy on V2N</b>	N/A	✓	✓
<b>Coexistence in 5.9GHz</b>	✓ (Adjacent channel with 3GPP tech)	✓ (Adjacent channel with 11p; co-channel coexistence from R14 onwards)	✓ (Adjacent channel with 11p; co-channel coexistence from R14 onwards & WiFi)
<b>Evolution path</b>	✗	✓	✓ Compatible with Rel-14/15

# Comparison: Radio design [www.cargeek.ir](http://www.cargeek.ir)

Radio design	802.11p	C-V2X Rel-14/15	C-V2X Rel-16(expected design)
<b>Synchronization</b>	Asynchronous	Synchronous	Synchronous
<b>Channel size</b>	10/20Mhz	Rel-14 – 10/20Mhz Rel-15 – 10/20/Nx20 MHz <sup>1</sup>	10/20 MHz and wideband (e.g. 40/60/80/100/...MHz
<b>Resource multiplexing across vehicles</b>	TDM only	TDM and FDM	TDM and FDM possible
<b>Data channel coding</b>	Convolutional	Turbo	LDPC
<b>HARQ Retransmission</b>	No	Rel-14/15 – yes Rel-15 – ultra-reliable communication possible <sup>2</sup>	Yes, along with ultra-reliable communication
<b>Waveform</b>	OFDM	SC-FDM	Likely OFDMA but many options available
<b>Resource Selection</b>	CSMA-CA	Semi-persistent transmission with frequency domain listen-before-talk	Many options available
<b>MIMO support</b>	No support standardized	Rx diversity for 2 antennas mandatory Tx diversity for 2 antennas supported	Support up to 8 tx/rx antennas Mandatory support for 2tx/rx antennas Both diversity and spatial multiplexing supported
<b>Modulation support</b>	Up to 64QAM	Up to 64 QAM	Up to 256QAM

# Comparison: Use cases and performance

Use Cases	802.11p	C-V2X Rel-14/15	C-V2X Rel-16(expected design)
<b>Target Use Cases</b>	Day 1 safety only	Day 1 safety & enhanced safety use cases	Advanced use cases to assist in autonomous driving including, ranging assisted positioning, high throughput sensor sharing & local 3D HD map updates
<b>Performance</b>			
<b>High density support</b>	 Packet loss at high densities	 Can guarantee no packet loss at high densities	 Can guarantee no packet loss at high densities
<b>High mobility support</b>	 Up to relative speeds of 500 km/hr with advanced receiver implementation	 Up to relative speed of 500 km/hr as a minimum requirement.	 Up to relative speed of 500 km/hr as a minimum requirement
<b>Transmission range @ 90% error, 280 km/hr relative speed</b>	Up to ~225m	-Over 450m using direct mode -Very large via cellular infrastructure	-Over 450m using direct mode -Very large via cellular infrastructure
<b>Typical transmission frequency for periodic traffic</b>	Once every 100msec (50ms is also possible)	Once every 100ms (20ms is also possible)	Supports packet periodicities of a few ms.

# C-V2X ecosystem and momentum

---





# C-V2X gaining support from automotive and telecom leaders

5GAA is a cross-industry consortia helps define 5G V2X communications



## Automotive industry

Vehicle platform, hardware, and software solutions



## Telecommunications

Connectivity and networking systems, devices, and technologies

End-to-end solutions for intelligent transportation mobility systems and smart cities

Analog Devices	AT&T	Audi	BAIC	BMW	Bosch	CAICT	CETECOM	China Mobile	Continental	Daimler
Danlaw	Denso	Ericsson	FEV	Ficosa	Ford	Gemalto	Hirschmann Car Communication	Huawei	Infineon	
Intel	Interdigital	Jaguar	KDDI	Keysight Technologies	KT	Laird	Land Rover	LG	MINI	muRata
Nokia	NTT DoCoMo	P3	Panasonic	Qualcomm	Rohde & Schwarz	ROHM	Rolls-Royce	SAIC Motor	Samsung	Savari
SK Telecom	SoftBank	T-Mobile	Telefonica	Telstra	TÜV Rheinland	Valeo	Verizon	VLAVI	Vodafone	ZF
ZTE										

# Building a comprehensive ecosystem with diverse expertise

## Necessary for C-V2X's successful commercialization and deployment

### Testing and certifications




Certification and compliance organizations



Test equipment vendors



ITS stack providers



Chipset manufacturers



Traffic industry suppliers



Telecom suppliers



Auto suppliers



Road operators



MNOs



Vehicle OEMs

### Standards



Standards development organizations



Telecom and auto industry organizations



ITS organizations



Road operator organizations


# Qualcomm is driving C-V2X towards commercialization

---

Chipset anticipated to be available for commercial sampling in the second half of 2018

- Supports C-V2X Direct Communications (V2V, V2I and V2P) for automakers and roadside infra providers
- Integrated GNSS support
- Pre-integrated with telematics unit for V2N operation
- Supports SIM-less operation
- Designed to work in ITS 5.9 GHz spectrum
- Designed for extended communication range and enhanced reliability
- Optimized for high vehicle density deployments
- Designed to empower vehicles, VRUs and RSUs

## Qualcomm® 9150 C-V2X Chipset

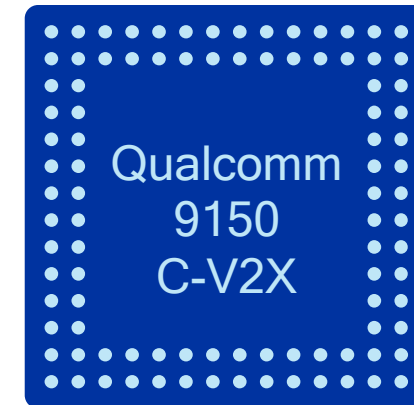


Qualcomm Technologies' first-announced C-V2X commercial solution based on 3GPP R-14 for PC5-based direct communications

# Delivering complete C-V2X solution for automotive road safety

Leveraging Qualcomm's unique capabilities in precise positioning, efficient processing and security

- C-V2X chipset with integrated GNSS
- An application processor running the Intelligent Transportation Systems (ITS) V2X stack
- A Hardware Security Module (HSM).

## Qualcomm® C-V2X Reference Design

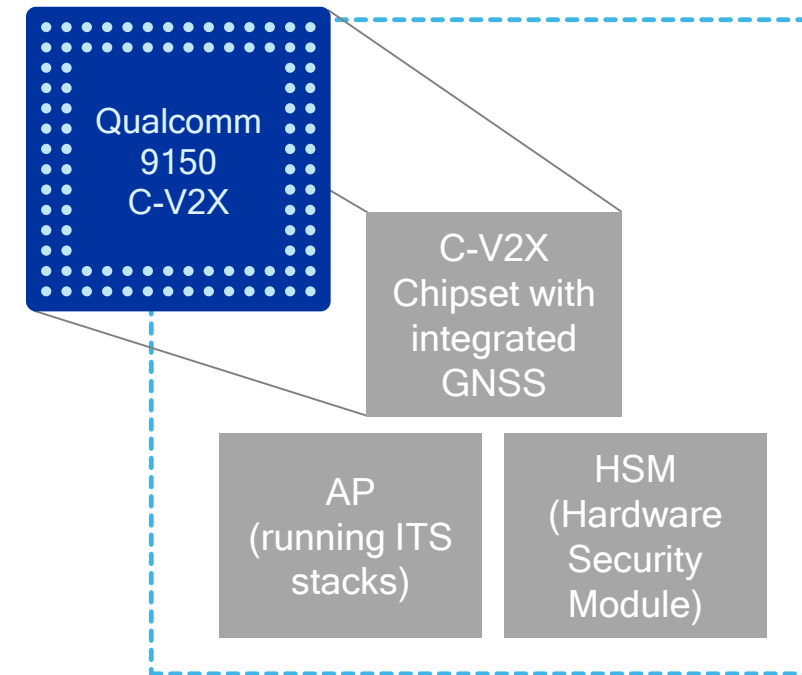

The Qualcomm 9150 C-V2X chipset will be featured as a part of the Qualcomm® C-V2X Reference Design

# Supported by global car OEMs - Europe examples

“Qualcomm Technologies’ anticipated 9150 C-V2X chipset serves as a major milestone in paving the road for 5G and safer autonomous driving,” said Dr. Thomas Müller, Head Electrics/Electronics, Audi. “As C-V2X continues to serve as an essential ingredient for enhanced safety for next-generation vehicles, Qualcomm Technologies’ 9150 C-V2X chipset will certainly help accelerate the adoption and deployment of C-V2X technologies.”

–Audi

“We are pleased to see C-V2X gaining momentum and broad ecosystem support, and how Qualcomm Technologies has helped the automotive industry make great strides in bringing this to fruition, including the announcement of the 9150 C-V2X chipset,” said Carla Gohin, Senior Vice President, Head of Innovation at Groupe PSA. “Groupe PSA is strongly involved in the 5G standardization and trials and has great expectations on 5G as an enabler for the connected and autonomous vehicles. C-V2X and its strong evolution path to 5G will serve as a key enabler for new mobility services. Groupe PSA will evaluate this technology, with Qualcomm Technologies’ support, to adopt for our cars.”

–Groupe PSA

# Supported by global car OEMs - US and China examples

“Ford is committed to V2X communications and sees it as a critical technology to improve vehicle safety and efficiency,” said Don Butler, executive director, Connected Vehicle and Services at Ford Motor Company. “We welcome Qualcomm Technologies’ cellular-V2X product announcement, as the automotive industry and ecosystem work towards C-V2X implementation, and pave the path to 5G broadband and future operating services.”

—Ford Motor Co.

“SAIC has always attached great importance to the development and application of new technologies. It is actively promoting the commercialization of new energy vehicles and internet-connected vehicles, and the development of autonomous vehicles. As vehicles become increasingly intelligent, it’s critical that our vehicles are equipped with premium-tier technologies to provide seamless communication between the vehicle and the roadway and beyond,” said Dr. Liu Fen, Director of Intelligent Driving, Research & Advanced Technology Department of SAIC. “We deem C-V2X technologies as the best choice, and look forward to utilizing these technologies in V2X. We admire the efforts Qualcomm Technologies has made and believe that the planned commercialization of their 9150 C-V2X chipset will accelerate the development of next-generation intelligent and connected vehicles.”

—SAIC



# 5G will bring new capabilities for autonomous vehicles

---

While maintaining backward compatibility




# 5G is important for our automotive vision

Providing a unifying connectivity fabric for the autonomous vehicle of the future



Enhanced mobile  
broadband

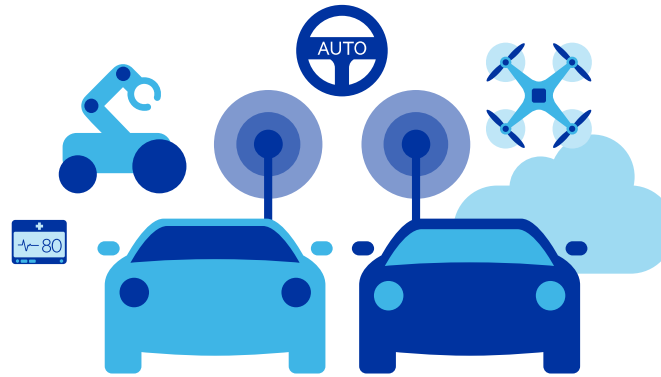

Mission-critical  
services



Massive Internet  
of Things

Unifying connectivity platform for future innovation

Starting today with Gigabit LTE, C-V2X Rel-14, and massive IoT deeper coverage

# 5G NR brings new capabilities to V2X communications

## Bringing complementary capabilities



Scalable OFDM numerology



Wideband transmissions for positioning



Advanced LDPC/polar channel coding



Self-contained sub-frame



Low-latency slot structure design



Massive MIMO

5G  
NR

## Direct communications

V2V, V2I, and V2P on “PC5” Interface, operating in ITS bands (e.g. ITS 5.9 GHz) independent of cellular network

- Higher throughput
- URLLC capabilities
- Designed to work without network assistance in ITS spectrum

## Network communications

V2N on “Uu” interface operates in traditional mobile broadband licensed spectrum

- Higher throughput
- URLLC capabilities

# 5G V2X brings new capabilities for the connected vehicle

While maintaining backward compatibility




## High throughput sensor sharing

High throughput and low-latency to enable the exchange of raw or processed data gathered



## Intention/Trajectory sharing

High throughput and low-latency to enable planned trajectory sharing



## Wideband ranging and positioning

Wideband carrier support to obtain accurate positioning and ranging for cooperated and automated use cases



## Local high definition maps / “Bird’s eye view”

High throughput to build local, dynamic maps based on camera and sensor data; and distribute them at street intersections

Wideband carrier support | High throughput | Ultra-low latency | Ultra-high reliability | Strong security

# We are accelerating the future of autonomous vehicles



## V2X wireless sensor

802.11p (DSRC/ITS-G5)  
C-V2X



## 3D HD maps

Semantic lane information  
Landmark and lane  
coordinates for positioning



## Precise positioning

GNSS positioning  
Dead reckoning  
VIO



## Heterogeneous connectivity

Cellular 3G / 4G / 5G  
Wi-Fi / BT  
CAN / Ethernet / Powerline



## On-board intelligence

Heterogeneous computing  
On-board machine learning  
Computer vision  
Sensor fusion  
Intuitive security



## Autonomous vehicle

Power optimized processing for the vehicle

Fusion of information from  
multiple sensors/sources

Path prediction, route planning,  
control feedback

# Thank you

---

Follow us on:   

For more information, visit us at:

[www.qualcomm.com](http://www.qualcomm.com) & [www.qualcomm.com/blog](http://www.qualcomm.com/blog)



Nothing in these materials is an offer to sell any of the components or devices referenced herein.

©2017 Qualcomm Technologies, Inc. and/or its affiliated companies. All Rights Reserved.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. Other products and brand names may be trademarks or registered trademarks of their respective owners.

References in this presentation to “Qualcomm” may mean Qualcomm Incorporated, Qualcomm Technologies, Inc., and/or other subsidiaries or business units within the Qualcomm corporate structure, as applicable. Qualcomm Incorporated includes Qualcomm’s licensing business, QTL, and the vast majority of its patent portfolio. Qualcomm Technologies, Inc., a wholly-owned subsidiary of Qualcomm Incorporated, operates, along with its subsidiaries, substantially all of Qualcomm’s engineering, research and development functions, and substantially all of its product and services businesses, including its semiconductor business, QCT.